

YE-E219



YG X5070

BLUE-COATED SOLID CARBIDE END MILLS

For Machining High Hardened Steels
For High Speed Cutting & Dry Cutting
For Mold & Die

YG-1 CO., LTD.

HEAD OFFICE

211, Sewolcheon-ro, Bupyeong-gu, Incheon, South Korea

Phone: +82-32-526-0909

Http://www.yg1.kr

E-mail: yg1@yg1.kr

Note The information is provided for reference only. Tool specifications are subject to change without prior notice. Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application. YG-1 or publishers are not liable for any damage for use of the information.

YouTube f in ㉞ ㉟ ㊲
Search 'YG-1' on social media outlets



YG1E2191025007



CASE STUDY - TEST 1

► Solid Carbide 6 Flute 45° Helix End Mill for Hardened Steels

Tools	6Flute, X5070 45° Helix
Size	Ø16×Ø16×40×110
Work Material	- DIN:X40CrMoV5-1(1.2344) - JIS:SKD61(HRc50) - AISI:H13
Cutting Speed	96.5 m/min.
R.P.M	1,920 rev./min.
Feed	912 mm/min.
Milling Method	Down & Side Cutting
Milling Depth	Axial : 24 mm Radial : 0.96 mm
Coolant	Dry Cut
Overhang	52 mm
Machine	Machining Center

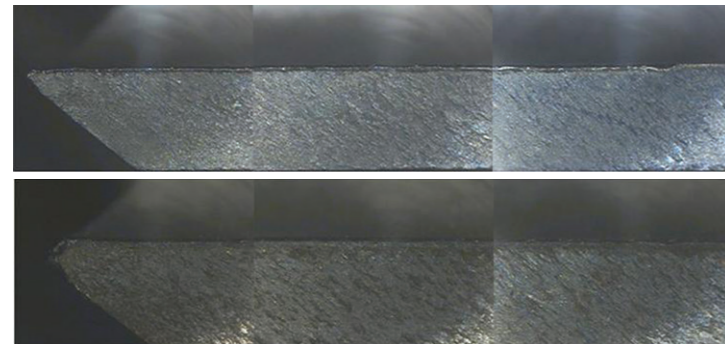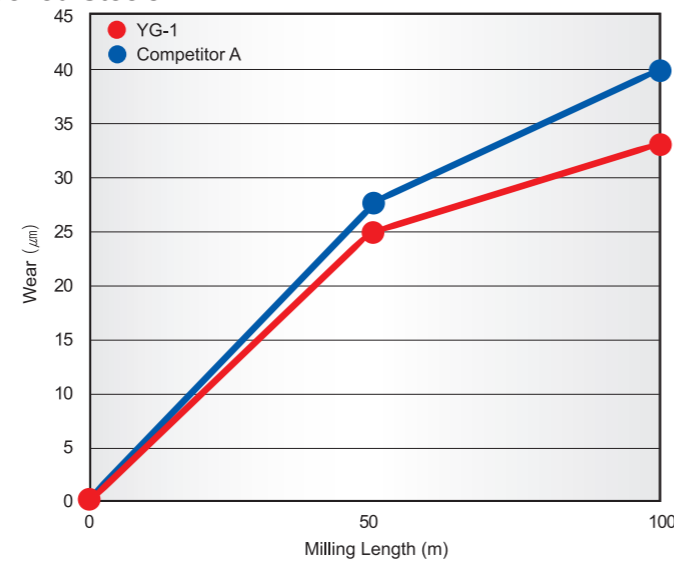


YG-1
(Total Milling Length 100m)

Competitor A
(Total Milling Length 100m)


CASE STUDY - TEST 2

► Solid Carbide 4 Flute Center Match Ball End Mill for Hardened Steels

Tools	4Flute, X5070 Ball Nose
Size	Ø10×Ø10×18×100
Work Material	- DIN:X155CrVMo12-1(1.2379) - JIS:SKD11(HRc60) - AISI:D2
Cutting Speed	210.486 m/min.
R.P.M	6,700 rev./min.
Feed	2,800 mm/min.
Milling Method	Side Cutting
Milling Depth	Axial : 0.2 mm Radial : 0.5 mm
Coolant	Oil Mist
Overhang	32 mm
Machine	Machining Center

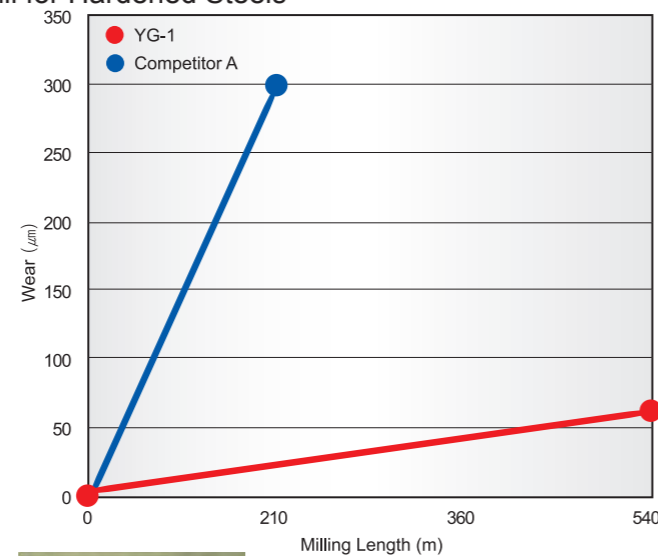


YG-1
(Total Milling Length 540m)



Competitor A
(Total Milling Length 210m)

High Feed End Mill Capabilities :

- ✓ High speed roughing
- ✓ High speed finishing... Mirror-like surface

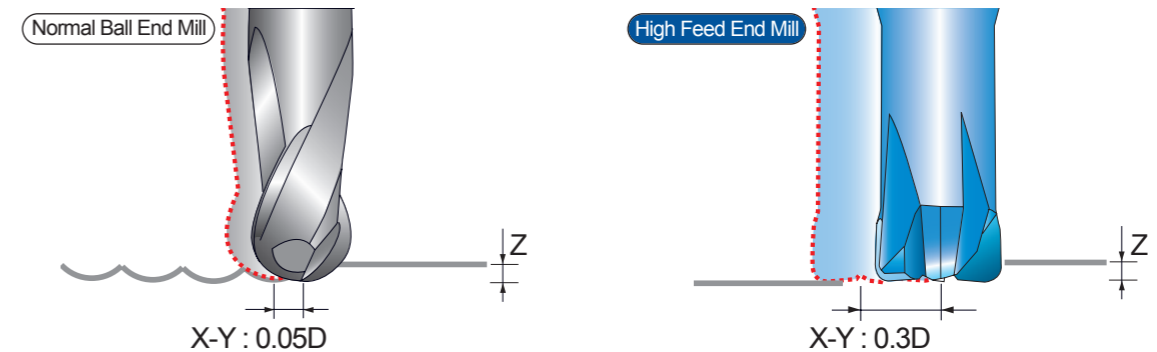


► More number of flutes than the normal 2F ball E/M results in high-feed cutting. For X - Y wide cutting pitch, high effective cutting performs in short tool working time.

(Example of performance : for the material HRc 50~55)

ITEM	SIZE	RPM	FEED	DEPTH OF CUT	
				Z(mm)	X-Y(mm)
HIGH FEED END MILL	4F Ø10 X R2	5,400	11,000	0.2	3.0
NORMAL BALL END MILL	2F Ø10 X R5	7,500	2,500	0.2	0.5

► For cutting on slopes and corners, the remaining part to be cut is smaller than one that remains after working with normal ball End Mill. It saves the time and cost

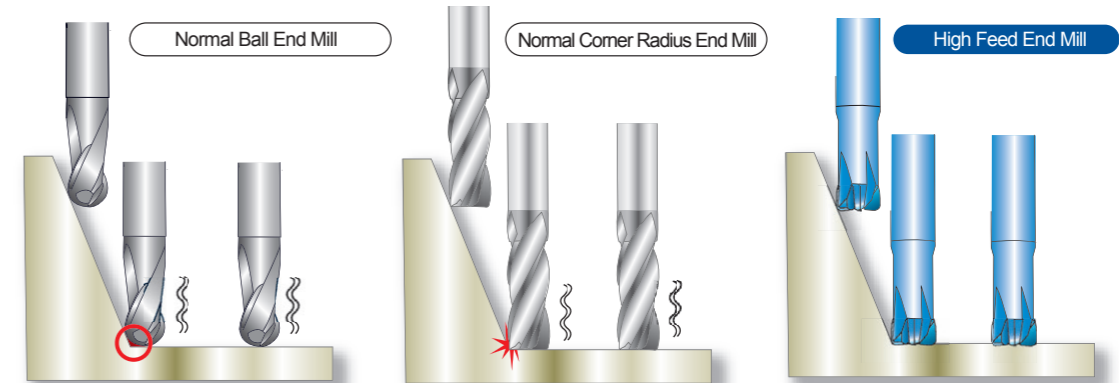

► By using straight flute, the rigidity of corner radius is improved. And it's also possible to get less damage to end teeth and radius than normal radius End Mill.

GUIDE LINE TO ICONS

Tool Raw Material

CARBIDE

Tolerance of Radius

R ±0.005 R ±0.010

Tolerance of Ball Radius

R ±0.005 R ±0.010 R ±0.015

Tolerance of Corner Radius

Type of Shank

PLAIN

Surface Treatment

BLUE

Cutting Condition pages

No. of Flutes

2 3 4 6 6&8

Helix Angle

30° 0° 30° 45°



SERIES	G8B59	G8B54	G8A46	G8A54
FLUTE	4	4	2	2
HELIX ANGLE	0°	0°	30°	30°
CUTTING EDGE SHAPE	CORNER RADIUS	CORNER RADIUS	BALL NOSE	BALL NOSE
SIZE MIN	D2.0	D2.0	R0.05	R0.25
SIZE MAX	D12.0	D16.0	R2.0	R1.0
PAGE	7	8	9	13

SOLID CARBIDE
X5070
END MILLS
High Hardened Steels HRc45 to HRc70,
High Speed Machining, Dry Cutting

	HIGH FEED	HIGH FEED LONG SHANK	RIB PROCESSING	RIB PROCESSING
	Blue Coating	Blue Coating	Blue Coating	Blue Coating




Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P. 41

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc					
P	1	Non-alloy steel	About 0.15% C Annealed	125						
	2		About 0.45% C Annealed	190	13					
	3		About 0.45% C Quenched & Tempered	250	25					
	4		About 0.75% C Annealed	270	28					
	5		About 0.75% C Quenched & Tempered	300	32	○	○	○	○	
	6	Low alloy steel	Annealed	180	10					
	7		Quenched & Tempered	275	29					
	8		Quenched & Tempered	300	32	○	○	○	○	
	9		Quenched & Tempered	350	38	○	○	○	○	
	10		High alloyed steel, and tool steel	Annealed	200	15				
	11	Quenched & Tempered		325	35	○	○	○	○	
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15					
	13		Martensitic Quenched & Tempered	240	23					
	14		Austenitic	180	10					
K	15	Grey cast iron	Pearlitic / ferritic	180	10					
	16		Pearlitic (Martensitic)	260	26					
	17	Nodular cast iron	Ferritic	160	3					
	18		Pearlitic	250	25					
	19		Malleable cast iron	Ferritic	130					
20	Pearlitic	230		21						
N	21	Aluminum-wrought alloy	Not Curable	60						
	22		Curable Hardened	100						
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75						
	24		≤ 12% Si, Curable Hardened	90						
	25		> 12% Si, Not Curable	130						
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110						
	27		CuZn, CuSnZn (Brass)	90						
	28		CuSn, lead-free copper and electrolytic copper	100						
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic							
	30		Rubber, Wood, etc.							
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15				
	32			Cured	280	30				
	33		Ni or Co Based	Annealed	250	25				
	34			Cured	350	38				
	35			Cast	320	34				
	36	Titanium Alloys	Pure Titanium	400 Rm						
	37		Alpha + Beta Alloys Hardened	1050 Rm						
H	38	Hardened steel	Hardened	550	55	◎	◎	◎	◎	
	39		Hardened	630	60	◎	◎	◎	◎	
	40	Chilled Cast Iron	Cast	400	42	○	○	○	○	
	41	Hardened Cast Iron	Hardened	550	55	◎	◎	◎	◎	

G8A28	G8A38	G8A53	G8A59	G8D62	G8A60	G8A36	G8A52	G8A50	G8A47	G8A37	G8B08	G8A39
2	2	2	3	4	2	2	2	2	4	4	4	6
30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	45°
BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS
R0.05	R0.5	R0.2	R1.5	R1.5	D0.5	D0.3	D0.5	D0.3	D3.0	D1.0	D6.0	D6.0
R6.0	R12.5	R1.0	R10.0	R10.0	D12.0	D20.0	D2.0	D2.0	D12.0	D20.0	D12.0	D20.0
14	16	17	18	19	20	25	27	28	29	30	31	32
EXTENDED NECK	EXTENDED NECK	MINIATURE	Center Match	Center Match	RIB PROCESSING	EXTENDED NECK	RIB PROCESSING	MINIATURE	EXTENDED NECK	EXTENDED NECK	EXTENDED NECK	EXTENDED NECK
Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating

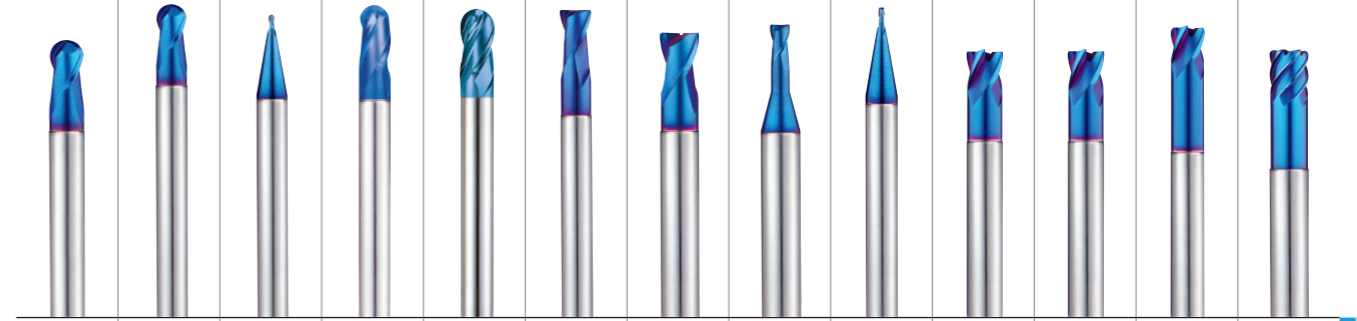

													1
													2
													3
													4
○	○	○	○	○	○	○	○	○	○	○	○	○	5
													6 P
○	○	○	○	○	○	○	○	○	○	○	○	○	7
○	○	○	○	○	○	○	○	○	○	○	○	○	8
○	○	○	○	○	○	○	○	○	○	○	○	○	9
○	○	○	○	○	○	○	○	○	○	○	○	○	10
○	○	○	○	○	○	○	○	○	○	○	○	○	11
													12
													13 M
													14
													15
													16
													17
													18 K
													19
													20
													21
													22
													23
													24
													25
													26 N
													27
													28
													29
													30
													31
													32
													33
													34 S
													35
													36
													37
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	38
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	39
○	○	○	○	○	○	○	○	○	○	○	○	○	40
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	41



SERIES	G8A45	G8A01	G8A02	G8D63	G8D64
FLUTE	2	2	4	6&8	6&8
HELIX ANGLE	30°	30°	30°	45°	45°
CUTTING EDGE SHAPE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE
SIZE MIN	D0.1	D0.1	D1.0	D6.0	D6.0
SIZE MAX	D4.0	D20.0	D20.0	D25.0	D25.0
PAGE	33	37	38	39	40
RIB PROCESSING	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating
EXTENDED NECK					
EXTENDED NECK					
LONG LENGTH					
EXTRA LONGLENGTH					

SOLID CARBIDE
X5070
END MILLS
High Hardened Steels HRc45 to HRc70,
High Speed Machining, Dry Cutting



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P. 41

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc						
P	1	Non-alloy steel	About 0.15% C Annealed	125							
	2		About 0.45% C Annealed	190	13						
	3		About 0.45% C Quenched & Tempered	250	25						
	4		About 0.75% C Annealed	270	28						
	5		About 0.75% C Quenched & Tempered	300	32	○	○	○	○	○	
	6	Low alloy steel	Annealed	180	10						
	7		Quenched & Tempered	275	29						
	8		Quenched & Tempered	300	32	○	○	○	○	○	
	9		Quenched & Tempered	350	38	○	○	○	○	○	
	10		High alloyed steel, and tool steel	Annealed	200	15					
	11	Quenched & Tempered		325	35	○	○	○	○	○	
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15						
	13		Martensitic Quenched & Tempered	240	23						
	14		Austenitic	180	10						
K	15	Grey cast iron	Pearlitic / ferritic	180	10						
	16		Pearlitic (Martensitic)	260	26						
	17	Nodular cast iron	Ferritic	160	3						
	18		Pearlitic	250	25						
	19		Ferritic	130							
20	Malleable cast iron	Pearlitic	230	21							
N	21	Aluminum-wrought alloy	Not Curable	60							
	22		Curable Hardened	100							
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75							
	24		≤ 12% Si, Curable Hardened	90							
	25		> 12% Si, Not Curable	130							
	26		Cutting Alloys, PB>1%	110							
	27	Copper and Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90							
	28		CuSn, lead-free copper and electrolytic copper	100							
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic								
	30		Rubber, Wood, etc.								
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15					
	32			Cured	280	30					
	33		Ni or Co Based	Annealed	250	25					
	34			Cured	350	38					
	35		Titanium Alloys	Alpha + Beta Alloys	Cast	320	34				
	36				Pure Titanium	400 Rm					
37			Hardened	1050 Rm							
H	38	Hardened steel		Hardened	550	55	◎	◎	◎	◎	
	39			Hardened	630	60	◎	◎	◎	◎	
	40	Hardened Cast Iron		Cast	400	42	○	○	○	○	
	41			Hardened	550	55	◎	◎	◎	◎	

BLUE-COATED SOLID CARBIDE END MILLS
4 FLUTE STUB LENGTH CORNER RADIUS HIGH FEED

PLAIN SHANK **G8B59** SERIES

- ▶ Excellent wear resistance at heavy feed rates on high hardened material.
- ▶ Designed with reduced clearance angles and short flutes for strength.
- ▶ High hardness & heat resistance coating for long life in dry applications.



CARBIDE 4 BLUE 0° ±0.005 PLAIN P. 41

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.005)	D1	D2	L1	L3	L2	D3
G8B5902005	R0.5	2.0	6	1	6	50	1.8
G8B5903005	R0.5	3.0	6	1.2	8	50	2.8
G8B5904005	R0.5	4.0	6	1.5	10	50	3.8
G8B5906005	R0.5	6.0	6	2.5	12	60	5.4
G8B5906010	R1.0	6.0	6	2.5	12	60	5.4
G8B5908010	R1.0	8.0	8	3.5	16	60	7.2
G8B5908020	R2.0	8.0	8	3.5	16	60	7.2
G8B5910010	R1.0	10.0	10	4	20	70	9
G8B5910020	R2.0	10.0	10	4	20	70	9
G8B5912020	R2.0	12.0	12	5	25	80	11
G8B5912030	R3.0	12.0	12	5	25	80	11

Mill Dia. Tolerance (mm)	Corner Radius Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.02	± 0.005	h5

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Comparison of the endteeth shape

High Feed End Mill

Normal End Mill

- Reduced clearance angles and short flutes strengthens corner radius and reduces chattering
- Extra-short flute length for high rigidity
- Heavy core with reduced diameter allows greater depths and maximum rigidity

◎ : Excellent ○ : Good


ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend					○				○	○	○									

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	○	◎

BLUE-COATED SOLID CARBIDE END MILLS

4 FLUTE STUB LENGTH CORNER RADIUS HIGH FEED (Long Shank) PLAIN SHANK G8B54 SERIES


- ▶ Excellent wear resistance at heavy feed rates on high hardened material.
- ▶ Designed with reduced clearance angles and short flutes for strength.
- ▶ High hardness & heat resistance coating for long life in dry applications.

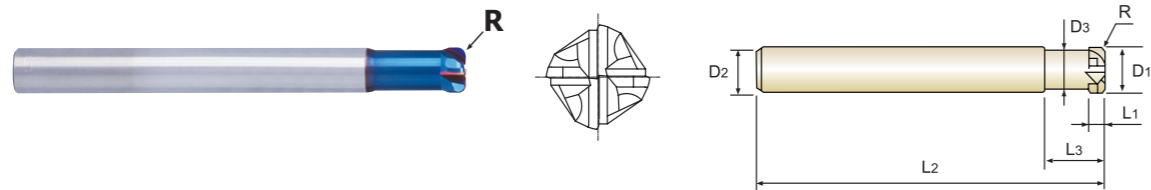

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.005)	D1	D2	L1	L3	L2	D3
G8B5402005	R0.5	2.0	6	1	6	70	1.8
G8B5403005	R0.5	3.0	6	1.2	8	70	2.8
G8B5404005	R0.5	4.0	6	1.5	10	70	3.8
G8B5405005	R0.5	5.0	6	2	10	70	4.6
G8B5406005	R0.5	6.0	6	2.5	12	90	5.4
G8B5406010	R1.0	6.0	6	2.5	12	90	5.4
G8B5408010	R1.0	8.0	8	3.5	16	100	7.2
G8B5408020	R2.0	8.0	8	3.5	16	100	7.2
G8B5410010	R1.0	10.0	10	4	20	100	9
G8B5410020	R2.0	10.0	10	4	20	100	9
G8B5412020	R2.0	12.0	12	5	25	110	11
G8B5412030	R3.0	12.0	12	5	25	110	11
G8B5416030	R3.0	16.0	16	6.5	30	130	15

Mill Dia. Tolerance (mm)	Corner Radius Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.02	± 0.005	h5

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

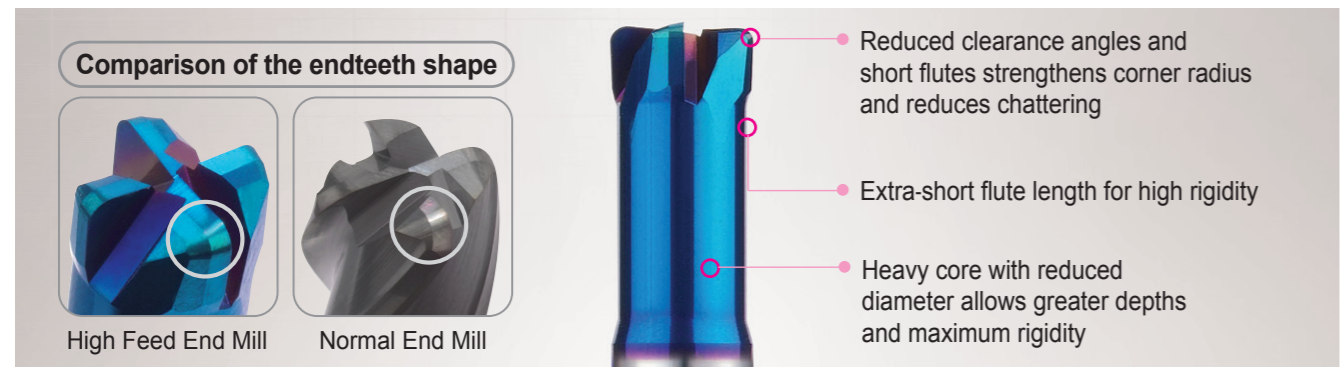


ISO Material Description	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommend	○					○					○				○		○		○		○	

BLUE-COATED SOLID CARBIDE END MILLS

2 FLUTE BALL NOSE for RIB PROCESSING PLAIN SHANK G8A46 SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Designed for high precision milling operation.
- ▶ Higher wear-resistance.

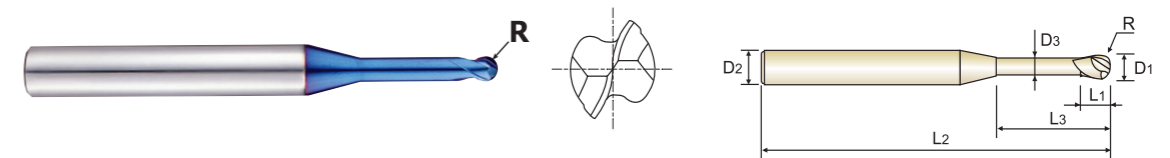

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.005)	D1	D2	L1	L3	L2	D3
G8A46805	R0.05	0.1	4	0.1	0.3	45	0.085
G8A46806	R0.05	0.1	4	0.1	0.5	45	0.085
G8A46002	R0.1	0.2	4	0.2	0.5	45	0.17
G8A46977	R0.1	0.2	4	0.2	1	45	0.17
G8A46958	R0.1	0.2	4	0.2	1.5	45	0.17
G8A46003	R0.15	0.3	4	0.3	1	45	0.27
G8A46959	R0.15	0.3	4	0.3	2	45	0.27
G8A46986	R0.15	0.3	4	0.3	3	45	0.27
G8A46004	R0.2	0.4	4	0.4	1	45	0.37
G8A46960	R0.2	0.4	4	0.4	2	45	0.37
G8A46961	R0.2	0.4	4	0.4	3	45	0.37
G8A46981	R0.2	0.4	4	0.4	4	45	0.37
G8A46987	R0.2	0.4	4	0.4	5	45	0.37
G8A46005	R0.25	0.5	4	0.4	2	45	0.45
G8A46804	R0.25	0.5	4	0.4	2.5	45	0.45
G8A46962	R0.25	0.5	4	0.4	4	45	0.45
G8A46963	R0.25	0.5	4	0.4	6	45	0.45
G8A46964	R0.25	0.5	4	0.4	8	45	0.45
G8A46957	R0.3	0.6	4	0.5	2	45	0.55
G8A46988	R0.3	0.6	4	0.5	3	45	0.55
G8A46915	R0.3	0.6	4	0.5	4	45	0.55
G8A46989	R0.3	0.6	4	0.5	5	45	0.55

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool. ▶ NEXT PAGE



Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.012	h5

ISO Material Description	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	19	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommend	○					○					○				○		○		○		○	

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE BALL NOSE for RIB PROCESSING

PLAIN SHANK **G8A46** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Designed for high precision milling operation.
- ▶ Higher wear-resistance.

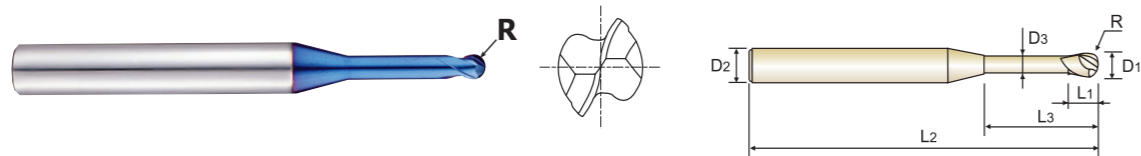

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.005)	D1	D2	L1	L3	L2	D3
G8A46916	R0.3	0.6	4	0.5	6	45	0.55
G8A46917	R0.3	0.6	4	0.5	8	45	0.55
G8A46990	R0.3	0.6	4	0.5	10	45	0.55
G8A46918	R0.4	0.8	4	0.6	2	45	0.75
G8A46919	R0.4	0.8	4	0.6	4	45	0.75
G8A46008	R0.4	0.8	4	0.6	6	45	0.75
G8A46901	R0.4	0.8	4	0.6	8	45	0.75
G8A46965	R0.4	0.8	4	0.6	10	45	0.75
G8A46920	R0.5	1.0	4	0.8	3	45	0.95
G8A46921	R0.5	1.0	4	0.8	4	45	0.95
G8A46923	R0.5	1.0	4	0.8	5	45	0.95
G8A46010	R0.5	1.0	4	0.8	6	45	0.95
G8A46924	R0.5	1.0	4	0.8	7	45	0.95
G8A46902	R0.5	1.0	4	0.8	8	45	0.95
G8A46925	R0.5	1.0	4	0.8	9	45	0.95
G8A46903	R0.5	1.0	4	0.8	10	45	0.95
G8A46904	R0.5	1.0	4	0.8	12	45	0.95
G8A46926	R0.5	1.0	4	0.8	14	50	0.95
G8A46927	R0.5	1.0	4	0.8	16	50	0.95
G8A46966	R0.5	1.0	4	0.8	20	55	0.95
G8A46982	R0.6	1.2	4	1.0	6	45	1.15
G8A46012	R0.6	1.2	4	1.0	8	45	1.15

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool. ▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.012	h5

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	35	15	15	23	10	26	3	25	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	200	240	180	260	160	250	130	230		
Recommend	○										○		○		○		○		○	

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○										○					○		○	○	○	

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE BALL NOSE for RIB PROCESSING

PLAIN SHANK **G8A46** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Designed for high precision milling operation.
- ▶ Higher wear-resistance.

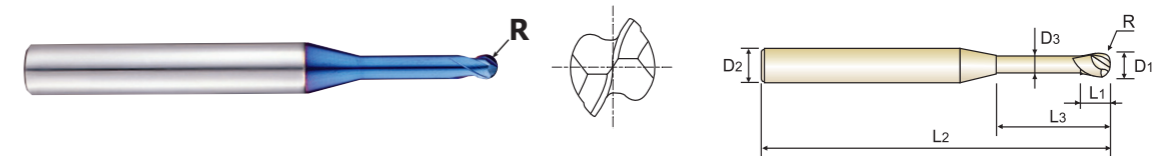

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.005)	D1	D2	L1	L3	L2	D3
G8A46983	R0.6	1.2	4	1.0	10	45	1.15
G8A46905	R0.6	1.2	4	1.0	12	45	1.15
G8A46930	R0.75	1.5	4	1.2	6	45	1.45
G8A46015	R0.75	1.5	4	1.2	8	45	1.45
G8A46931	R0.75	1.5	4	1.2	10	45	1.45
G8A46906	R0.75	1.5	4	1.2	12	45	1.45
G8A46992	R0.75	1.5	4	1.2	14	50	1.45
G8A46907	R0.75	1.5	4	1.2	16	50	1.45
G8A46932	R0.75	1.5	4	1.2	20	55	1.45
G8A46939	R1.0	2.0	4	1.6	4	45	1.95
G8A46940	R1.0	2.0	4	1.6	6	45	1.95
G8A46020	R1.0	2.0	4	1.6	8	45	1.95
G8A46941	R1.0	2.0	4	1.6	10	45	1.95
G8A46942	R1.0	2.0	4	1.6	12	50	1.95
G8A46943	R1.0	2.0	4	1.6	14	50	1.95
G8A46909	R1.0	2.0	4	1.6	16	50	1.95
G8A46993	R1.0	2.0	4	1.6	18	55	1.95
G8A46910	R1.0	2.0	4	1.6	20	55	1.95
G8A46944	R1.0	2.0	4	1.6	22	60	1.95
G8A46945	R1.0	2.0	4	1.6	25	60	1.95
G8A46967	R1.0	2.0	4	1.6	30	70	1.95
G8A46948	R1.5	3.0	6	2.4	12	50	2.85

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool. ▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.012	h5

◎ : Excellent ○ : Good



ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	35	15	15	23	10	26	3	25	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	200	240	180	260	160	250	130	230		
Recommend	○										○		○		○		○		○	

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○										○					○		○	○	○	

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE BALL NOSE for RIB PROCESSING

PLAIN SHANK **G8A46** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Designed for high precision milling operation.
- ▶ Higher wear-resistance.

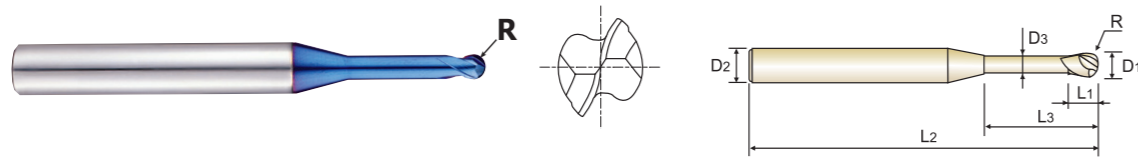

P. 42-43

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.005)	D1	D2	L1	L3	L2	D3
G8A46984	R1.5	3.0	6	2.4	14	55	2.85
G8A46030	R1.5	3.0	6	2.4	16	55	2.85
G8A46985	R1.5	3.0	6	2.4	18	60	2.85
G8A46911	R1.5	3.0	6	2.4	20	60	2.85
G8A46968	R1.5	3.0	6	2.4	25	65	2.85
G8A46969	R1.5	3.0	6	2.4	30	70	2.85
G8A46970	R1.5	3.0	6	2.4	35	80	2.85
G8A46950	R2.0	4.0	6	3.2	12	60	3.85
G8A46040	R2.0	4.0	6	3.2	16	60	3.85
G8A46912	R2.0	4.0	6	3.2	20	65	3.85
G8A46913	R2.0	4.0	6	3.2	25	70	3.85
G8A46971	R2.0	4.0	6	3.2	30	70	3.85
G8A46972	R2.0	4.0	6	3.2	35	80	3.85
G8A46973	R2.0	4.0	6	3.2	40	90	3.85
G8A46974	R2.0	4.0	6	3.2	45	90	3.85
G8A46975	R2.0	4.0	6	3.2	50	100	3.85

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.012	h5

◎ : Excellent ○ : Good



ISO Material Description	P											M				K					
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	26	3	25	3	25	3	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○					○						○		○		○		○		○	

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○					○					○					◎		○	◎		

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE BALL NOSE for RIB PROCESSING

PLAIN SHANK **G8A54** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Designed for high precision milling operation.
- ▶ Higher wear-resistance.

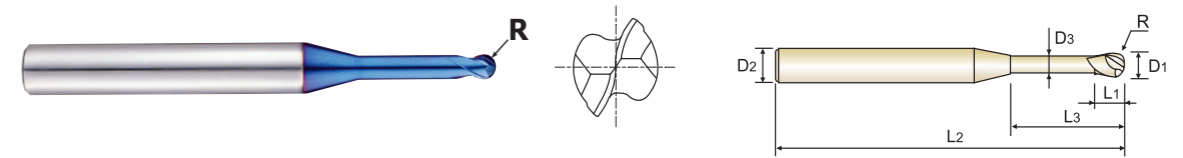

P. 42-43

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.005)	D1	D2	L1	L3	L2	D3
G8A54005	R0.25	0.5	6	0.5	1.5	50	0.45
G8A54901	R0.25	0.5	6	0.5	3.3	50	0.45
G8A54006	R0.3	0.6	6	0.6	2	50	0.55
G8A54902	R0.3	0.6	6	0.6	4	50	0.55
G8A54008	R0.4	0.8	6	0.8	2.5	50	0.75
G8A54903	R0.4	0.8	6	0.8	5.5	50	0.75
G8A54010	R0.5	1.0	6	1	3.3	50	0.95
G8A54904	R0.5	1.0	6	1	6.7	50	0.95
G8A54905	R0.5	1.0	6	1	12	50	0.95
G8A54012	R0.6	1.2	6	1.2	4.4	50	1.15
G8A54906	R0.6	1.2	6	1.2	8	50	1.15
G8A54015	R0.75	1.5	6	1.5	5	50	1.45
G8A54907	R0.75	1.5	6	1.5	9.7	50	1.45
G8A54908	R0.75	1.5	6	1.5	15	50	1.45
G8A54020	R1.0	2.0	6	2	6	50	1.95
G8A54909	R1.0	2.0	6	2	13	50	1.95
G8A54910	R1.0	2.0	6	2	20	60	1.95

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.012	h5

◎ : Excellent ○ : Good



ISO Material Description	P											M				K					
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	26	3	25	3	25	3	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○					○						○		○		○		○		○	

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○					○					○					◎		○	◎		

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE BALL NOSE with EXTENDED NECK

PLAIN SHANK **G8A28** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Designed for high precision milling operation.
- ▶ Higher wear-resistance.

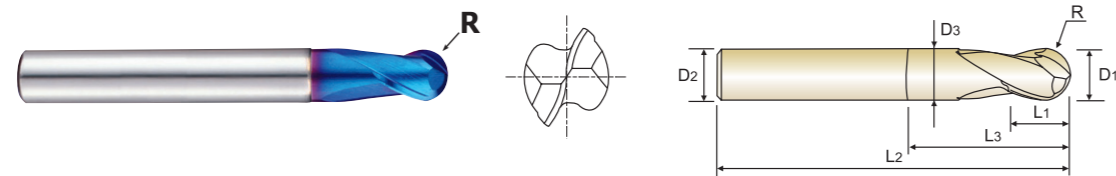

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A28001	R0.05	0.1	4	0.2	-	40	-
G8A28002	R0.1	0.2	4	0.3	-	40	-
G8A28003	R0.15	0.3	4	0.5	-	40	-
G8A28004	R0.2	0.4	4	0.6	-	40	-
G8A28005	R0.25	0.5	4	0.7	-	40	-
G8A28006	R0.3	0.6	4	0.9	-	40	-
G8A28007	R0.35	0.7	4	1.1	-	40	-
G8A28008	R0.4	0.8	4	1.2	-	40	-
G8A28009	R0.45	0.9	4	1.4	-	40	-
G8A280104S	R0.5	1.0	4	1.5	3	50	0.95
G8A28010	R0.5	1.0	6	1.5	3	50	0.95
G8A280154S	R0.75	1.5	4	2	4	50	1.45
G8A28015	R0.75	1.5	6	2	4	50	1.45
G8A280204S	R1.0	2.0	4	2.5	5	50	1.95
G8A28020	R1.0	2.0	6	2.5	5	50	1.95
G8A280254S	R1.25	2.5	4	3	7	50	2.4
G8A28025	R1.25	2.5	6	3	7	50	2.4
G8A28030	R1.5	3.0	6	4	10	60	2.85
G8A28035	R1.75	3.5	6	4.5	10	60	3.35
G8A28040	R2.0	4.0	6	5	10	60	3.85
G8A28045	R2.25	4.5	6	5.5	10	60	4.35
G8A28050	R2.5	5.0	6	6	12	60	4.85

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool. ▶ NEXT PAGE

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good



ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	29	32	38	35	15	35	15	23	10	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend																					

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																					

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE BALL NOSE with EXTENDED NECK

PLAIN SHANK **G8A28** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Designed for high precision milling operation.
- ▶ Higher wear-resistance.

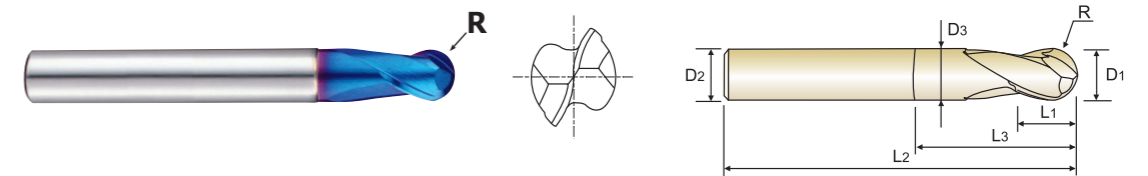

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A28055	R2.75	5.5	6	6.5	12	60	5.35
G8A28060	R3.0	6.0	6	7	15	60	5.85
G8A28903	R3.0	6.0	6	9	30	90	5.85
G8A28901	R4.0	8.0	8	9	15	60	7.7
G8A28080	R4.0	8.0	8	9	15	80	7.7
G8A28904	R4.0	8.0	8	12	30	100	7.7
G8A28902	R5.0	10.0	10	11	25	60	9.7
G8A28100	R5.0	10.0	10	11	25	80	9.7
G8A28905	R5.0	10.0	10	15	30	100	9.7
G8A28120	R6.0	12.0	12	14	25	80	11.7

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good



ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	29	32	38	35	15	35	15	23	10	10	26	3	25	19	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend																					

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																					

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE STUB LENGTH BALL NOSE with EXTENDED NECK

PLAIN SHANK **G8A38** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Designed for high precision milling operation.
- ▶ Higher wear-resistance.

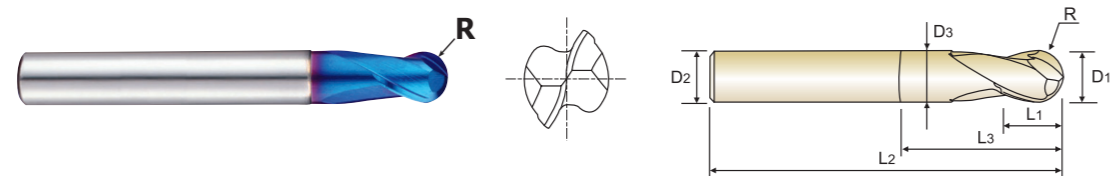

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A38010	R0.5	1.0	4	1	2.2	50	0.95
G8A38012	R0.6	1.2	4	1.2	2.6	50	1.15
G8A38015	R0.75	1.5	4	1.5	3	50	1.45
G8A380204S	R1.0	2.0	4	2	4	50	1.95
G8A38020	R1.0	2.0	6	2	4	50	1.95
G8A38030	R1.5	3.0	6	3	6	60	2.85
G8A38040	R2.0	4.0	6	4	8	70	3.85
G8A38050	R2.5	5.0	6	5	10	80	4.85
G8A38060	R3.0	6.0	6	6	12	90	5.85
G8A38070	R3.5	7.0	8	7	14	90	6.7
G8A38080	R4.0	8.0	8	8	16	100	7.7
G8A38090	R4.5	9.0	10	9	18	100	8.7
G8A38100	R5.0	10.0	10	10	20	100	9.7
G8A38120	R6.0	12.0	12	12	24	110	11.7
G8A38140	R7.0	14.0	14	14	28	110	13.7
G8A38160	R8.0	16.0	16	16	32	140	15.7
G8A38180	R9.0	18.0	18	18	36	140	17.7
G8A38200	R10.0	20.0	20	20	40	160	19.7
G8A38250	R12.5	25.0	25	25	50	180	24.7

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	29	32	38	35	35	15	23	10	26	3	25	3	25	3	25	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○					○					○				○						

ISO Material Description	N										S				H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○										◎				◎		○		◎		

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE MINIATURE BALL NOSE

PLAIN SHANK **G8A53** SERIES

- ▶ Applied center match type & special new design on ball center shape.
- ▶ Excellent high wear resistance and high performance.
- ▶ Applied for high speed and feed.
- ▶ Increased surface roughness.

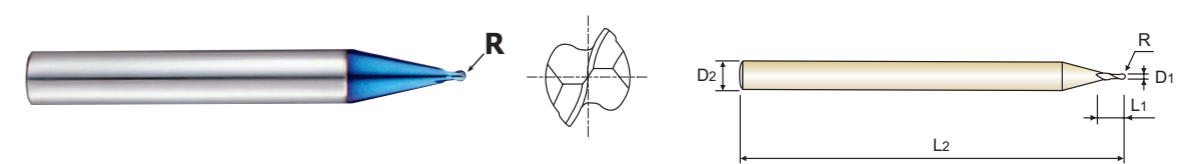

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R (±0.005)	D1	D2	L1	L2
G8A53004	R0.2	0.4	6	0.4	50
G8A53005	R0.25	0.5	6	0.5	50
G8A53006	R0.3	0.6	6	0.6	50
G8A53008	R0.4	0.8	6	0.8	50
G8A53010	R0.5	1.0	6	1.0	50
G8A53012	R0.6	1.2	6	1.2	50
G8A53015	R0.75	1.5	6	1.5	50
G8A53020	R1.0	2.0	6	2.0	50

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.012	h5

◎ : Excellent ○ : Good



ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	29	32	38	35	35	15	23	10	26	3	25	3	25	3	25	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○					○					○				○						

ISO Material Description	N										S				H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○										◎				◎		○		◎		

BLUE-COATED SOLID CARBIDE END MILLS 3 FLUTE BALL NOSE - Center Match

PLAIN SHANK **G8A59** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Designed for high precision milling operation.
- ▶ Higher wear-resistance.

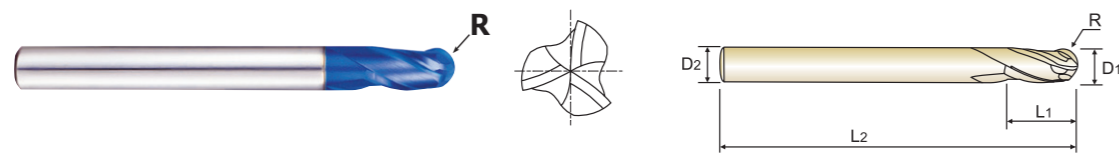

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D1	D2	L1	L2
G8A59030	R1.5	3.0	6	8	60
G8A59040	R2.0	4.0	6	8	70
G8A59050	R2.5	5.0	6	10	80
G8A59060	R3.0	6.0	6	12	90
G8A59080	R4.0	8.0	8	14	100
G8A59100	R5.0	10.0	10	18	100
G8A59120	R6.0	12.0	12	22	110
G8A59160	R8.0	16.0	16	30	140
G8A59200	R10.0	20.0	20	38	160

Unit : mm

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good



ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	35	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○					○					○		○		○		○		○	

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○		○			○		○			○					◎	◎	○	◎	○	◎

BLUE-COATED SOLID CARBIDE END MILLS 4 FLUTE BALL NOSE - Center Match

PLAIN SHANK **G8D62** SERIES

- ▶ Applied center match type & special new design on ball center shape.
- ▶ Excellent high wear resistance and high performance.
- ▶ Applied for high speed and feed.
- ▶ Increased surface roughness.

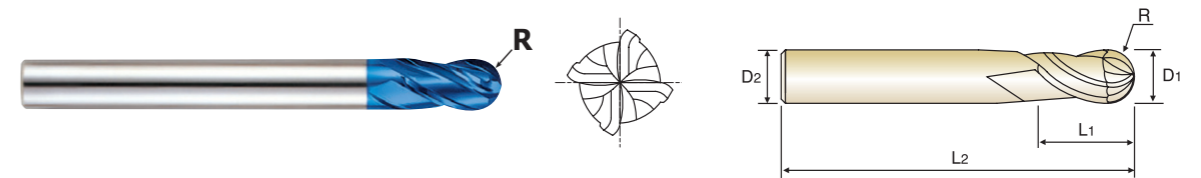

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D1	D2	L1	L2
G8D62030	R1.5	3.0	6	8	60
G8D62040	R2.0	4.0	6	8	70
G8D62050	R2.5	5.0	6	10	80
G8D62060	R3.0	6.0	6	12	90
G8D62080	R4.0	8.0	8	14	100
G8D62100	R5.0	10.0	10	18	100
G8D62120	R6.0	12.0	12	22	110
G8D62160	R8.0	16.0	16	30	140
G8D62200	R10.0	20.0	20	38	160

Unit : mm

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good



ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	35	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○					○					○		○		○		○		○	

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○		○			○		○			○					◎	◎	○	◎	○	◎

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE CORNER RADIUS for RIB PROCESSING

PLAIN SHANK **G8A60** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

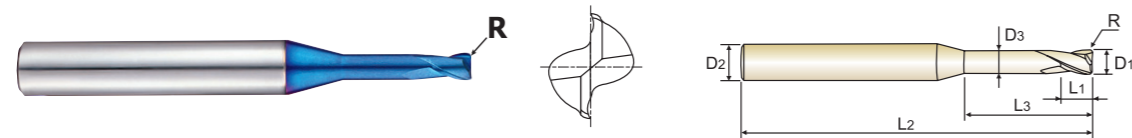

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A60936	R0.05	0.5	4	0.7	1.5	45	0.45
G8A60932	R0.05	0.5	4	0.7	2.5	45	0.45
G8A60935	R0.05	0.5	4	0.7	4	45	0.45
G8A60931	R0.05	0.6	4	0.9	2	45	0.55
G8A60933	R0.05	0.6	4	0.9	3	45	0.55
G8A60934	R0.05	0.6	4	0.9	4	45	0.55
G8A60060102	R0.1	0.6	4	0.9	2	45	0.55
G8A60070104	R0.1	0.7	4	1	4	45	0.65
G8A60080102	R0.1	0.8	4	1.2	2	45	0.75
G8A60008	R0.1	0.8	4	1.2	4	45	0.75
G8A60924	R0.1	0.8	4	1.2	6	45	0.75
G8A609254S	R0.1	1.0	4	1.5	4	50	0.95
G8A609264S	R0.1	1.0	4	1.5	6	50	0.95
G8A600100204	R0.2	1.0	4	1.5	4	50	0.95
G8A600100206	R0.2	1.0	4	1.5	6	50	0.95
G8A609114S	R0.2	1.0	4	1.5	8	50	0.95
G8A600100304	R0.3	1.0	4	1.5	4	50	0.95
G8A600100306	R0.3	1.0	4	1.5	6	50	0.95
G8A60980	R0.3	1.0	4	1.5	8	50	0.95
G8A60925	R0.1	1.0	6	1.5	4	50	0.95
G8A60926	R0.1	1.0	6	1.5	6	50	0.95
G8A60010	R0.2	1.0	6	1.5	4	50	0.95

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool. ▶ NEXT PAGE

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

◎ : Excellent ○ : Good



ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	30	15	15	23	10	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○										○		○		○					

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○										○					○					

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE CORNER RADIUS for RIB PROCESSING

PLAIN SHANK **G8A60** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

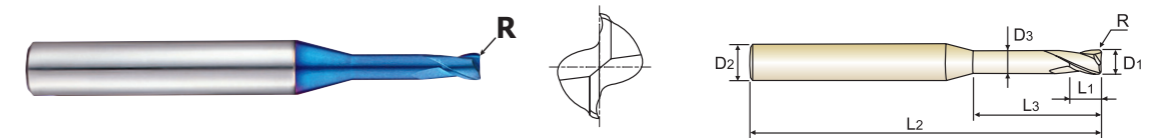

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A60910	R0.2	1.0	6	1.5	6	50	0.95
G8A60911	R0.2	1.0	6	1.5	8	50	0.95
G8A60912	R0.3	1.0	6	1.5	4	50	0.95
G8A60930	R0.3	1.0	6	1.5	6	50	0.95
G8A600100308	R0.3	1.0	6	1.5	8	50	0.95
G8A600154S	R0.2	1.5	4	2.5	4	50	1.45
G8A6001502064S	R0.2	1.5	4	2.5	6	50	1.45
G8A6001502084S	R0.2	1.5	4	2.5	8	50	1.45
G8A609134S	R0.2	1.5	4	2.5	10	50	1.45
G8A609144S	R0.2	1.5	4	2.5	12	50	1.45
G8A609154S	R0.3	1.5	4	2.5	4	50	1.45
G8A6001503064S	R0.3	1.5	4	2.5	6	50	1.45
G8A6001503084S	R0.3	1.5	4	2.5	8	50	1.45
G8A60015	R0.2	1.5	6	2.5	4	50	1.45
G8A600150206	R0.2	1.5	6	2.5	6	50	1.45
G8A600150208	R0.2	1.5	6	2.5	8	50	1.45
G8A60913	R0.2	1.5	6	2.5	10	50	1.45
G8A60914	R0.2	1.5	6	2.5	12	50	1.45
G8A60915	R0.3	1.5	6	2.5	4	50	1.45
G8A600150306	R0.3	1.5	6	2.5	6	50	1.45
G8A600150308	R0.3	1.5	6	2.5	8	50	1.45
G8A609274S	R0.2	2.0	4	3	6	50	1.95

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool. ▶ NEXT PAGE

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	30	15	15	23	10	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○										○		○		○					

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○										○					○					

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE CORNER RADIUS for RIB PROCESSING

PLAIN SHANK **G8A60** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

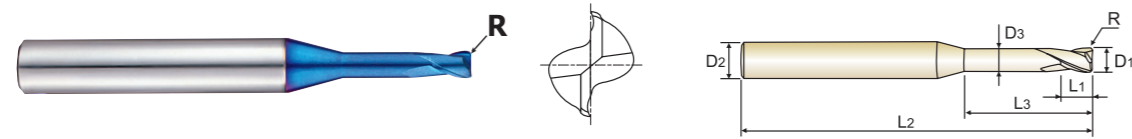

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A6002002084S	R0.2	2.0	4	3	8	50	1.95
G8A6002002104S	R0.2	2.0	4	3	10	55	1.95
G8A6002002124S	R0.2	2.0	4	3	12	55	1.95
G8A609164S	R0.3	2.0	4	3	6	50	1.95
G8A6002003084S	R0.3	2.0	4	3	8	50	1.95
G8A6002003104S	R0.3	2.0	4	3	10	55	1.95
G8A6002003124S	R0.3	2.0	4	3	12	55	1.95
G8A6002003164S	R0.3	2.0	4	3	16	55	1.95
G8A609174S	R0.5	2.0	4	3	6	50	1.95
G8A600204S	R0.5	2.0	4	3	10	55	1.95
G8A609184S	R0.5	2.0	4	3	12	55	1.95
G8A60927	R0.2	2.0	6	3	6	50	1.95
G8A600200208	R0.2	2.0	6	3	8	50	1.95
G8A600200210	R0.2	2.0	6	3	10	55	1.95
G8A600200212	R0.2	2.0	6	3	12	55	1.95
G8A60916	R0.3	2.0	6	3	6	50	1.95
G8A600200308	R0.3	2.0	6	3	8	50	1.95
G8A600200310	R0.3	2.0	6	3	10	55	1.95
G8A600200312	R0.3	2.0	6	3	12	55	1.95
G8A600200316	R0.3	2.0	6	3	16	55	1.95
G8A60917	R0.5	2.0	6	3	6	50	1.95
G8A60020	R0.5	2.0	6	3	10	55	1.95

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool. ▶ NEXT PAGE

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

◎ : Excellent ○ : Good



ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	29	32	38	30	15	35	15	23	10	26	3	25	3	25		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	260	160	250	130	230		
Recommend	○										○				○						

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	40	41	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○										◎					◎		○	◎		

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE CORNER RADIUS for RIB PROCESSING

PLAIN SHANK **G8A60** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

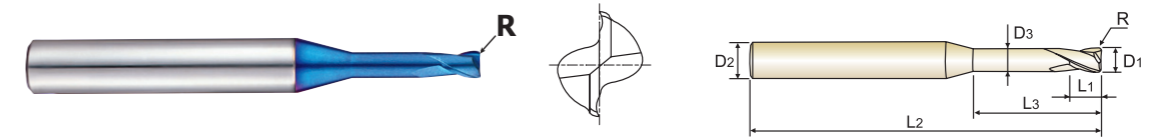

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A60918	R0.5	2.0	6	3	12	55	1.95
G8A600300208	R0.2	3.0	6	4	8	55	2.85
G8A600300210	R0.2	3.0	6	4	10	55	2.85
G8A600300212	R0.2	3.0	6	4	12	55	2.85
G8A600300216	R0.2	3.0	6	4	16	55	2.85
G8A600300308	R0.3	3.0	6	4	8	55	2.85
G8A60919	R0.3	3.0	6	4	10	55	2.85
G8A600300312	R0.3	3.0	6	4	12	55	2.85
G8A600300316	R0.3	3.0	6	4	16	55	2.85
G8A60030	R0.5	3.0	6	4	10	55	2.85
G8A600300512	R0.5	3.0	6	4	12	55	2.85
G8A60901	R0.5	3.0	6	4	16	55	2.85
G8A60902	R0.5	3.0	6	4	20	55	2.85
G8A600400212	R0.2	4.0	6	5	12	55	3.85
G8A600400216	R0.2	4.0	6	5	16	55	3.85
G8A600400220	R0.2	4.0	6	5	20	55	3.85
G8A600400310	R0.3	4.0	6	5	10	55	3.85
G8A60920	R0.3	4.0	6	5	12	55	3.85
G8A600400316	R0.3	4.0	6	5	16	55	3.85
G8A600400320	R0.3	4.0	6	5	20	55	3.85
G8A60040	R0.5	4.0	6	5	12	55	3.85
G8A60903	R0.5	4.0	6	5	16	55	3.85

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool. ▶ NEXT PAGE

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

◎ : Excellent ○ : Good



ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	29	32	38	30	15	35	15	23	10	26	3	25	3	25		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	260	160	250	130	230		
Recommend	○										○				○						

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	42	40	41	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○										◎					◎		○	◎		

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE CORNER RADIUS for RIB PROCESSING

PLAIN SHANK **G8A60** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

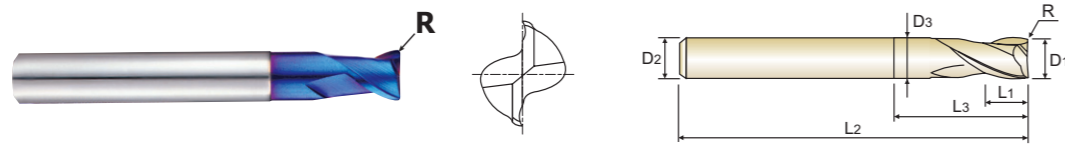

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A60904	R0.5	4.0	6	5	20	55	3.85
G8A600401012	R1.0	4.0	6	5	12	55	3.85
G8A600401016	R1.0	4.0	6	5	16	55	3.85
G8A60921	R0.3	6.0	6	7	20	60	5.85
G8A60060	R0.5	6.0	6	7	20	60	5.85
G8A60905	R1.0	6.0	6	7	20	60	5.85
G8A60906	R1.5	6.0	6	7	20	60	5.85
G8A600602020	R2.0	6.0	6	7	20	60	5.85
G8A60922	R0.3	8.0	8	9	25	60	7.7
G8A60929	R0.5	8.0	8	9	25	60	7.7
G8A60080	R1.0	8.0	8	9	25	60	7.7
G8A60907	R1.5	8.0	8	9	25	60	7.7
G8A600802025	R2.0	8.0	8	9	25	60	7.7
G8A60923	R0.3	10.0	10	11	32	70	9.7
G8A601000532	R0.5	10.0	10	11	32	70	9.7
G8A60100	R1.0	10.0	10	11	32	70	9.7
G8A60908	R1.5	10.0	10	11	32	70	9.7
G8A601002032	R2.0	10.0	10	11	32	70	9.7
G8A601200538	R0.5	12.0	12	12	38	80	11.7
G8A60120	R1.0	12.0	12	12	38	80	11.7
G8A60909	R1.5	12.0	12	12	38	80	11.7
G8A601202038	R2.0	12.0	12	12	38	80	11.7

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

◎ : Excellent ○ : Good



ISO Material Description	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	35	38	40	42	45	48	50	52	54	56	58	60	62	64	66	68	70	72
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommend	○										○				○							

ISO Material Description	N										S					H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommend	○										○					○							

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE STUB LENGTH CORNER RADIUS with EXTENDED NECK

PLAIN SHANK **G8A36** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

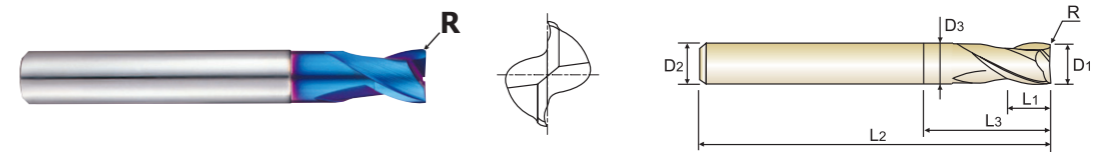

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A36003	-	0.3	3	0.45	-	40	-
G8A36004	-	0.4	3	0.6	-	40	-
G8A36005	R0.05	0.5	3	0.7	-	40	-
G8A36907	R0.05	0.5	4	1	-	40	-
G8A36006	R0.05	0.6	3	0.9	-	40	-
G8A36908	R0.05	0.6	4	1.2	-	40	-
G8A36909	R0.05	0.7	4	1.4	-	40	-
G8A36008	R0.05	0.8	3	1.2	-	40	-
G8A36910	R0.05	0.8	4	1.6	-	40	-
G8A36911	R0.05	0.9	4	2	-	40	-
G8A36010	R0.1	1.0	3	1.5	-	40	-
G8A36901	R0.1	1.0	4	1.5	-	40	-
G8A36903	R0.1	1.0	6	1.5	-	40	-
G8A36015	R0.1	1.5	3	2.2	-	40	-
G8A36904	R0.1	1.5	6	2.2	-	40	-
G8A36020	R0.1	2.0	3	3	6	40	1.95
G8A36902	R0.1	2.0	4	3	6	40	1.95
G8A36905	R0.1	2.0	6	3	6	40	1.95
G8A36025	R0.1	2.5	3	4	6	40	2.4
G8A36906	R0.1	2.5	6	4	6	40	2.4
G8A36030	R0.1	3.0	6	4	7	45	2.85
G8A36035	R0.1	3.5	6	5	9	45	3.35

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

▶ NEXT PAGE

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	35	38	40	42	45	48	50	52	54	56	58	60	62	64	66	68	70	72
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommend	○										○				○							


ISO Material Description	N										S					H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommend	○										○					○							

BLUE-COATED SOLID CARBIDE END MILLS

2 FLUTE STUB LENGTH CORNER RADIUS with EXTENDED NECK

PLAIN SHANK **G8A36** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

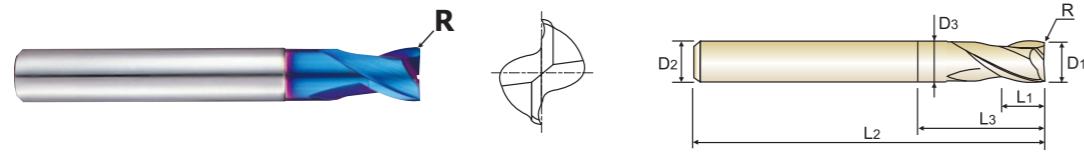

CARBIDE 2 BLUE 30° ±0.010 ±0.015 PLAIN P. 55-57

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A36040	R0.1	4.0	6	5	9	45	3.85
G8A36045	R0.1	4.5	6	6	10	45	4.35
G8A36050	R0.2	5.0	6	6	11	50	4.85
G8A36060	R0.2	6.0	6	7	14	50	5.85
G8A36080	R0.2	8.0	8	9	18	60	7.7
G8A36100	R0.2	10.0	10	12	25	75	9.7
G8A36120	R0.3	12.0	12	15	30	75	11.7
G8A36160	R0.3	16.0	16	18	38	90	15.7
G8A36200	R0.3	20.0	20	24	45	100	19.7

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	35	32	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○					○					○				○					


ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○					○					◎			◎	◎	◎	◎	◎	◎	◎	◎	◎

BLUE-COATED SOLID CARBIDE END MILLS

2 FLUTE CORNER RADIUS for RIB PROCESSING

PLAIN SHANK **G8A52** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

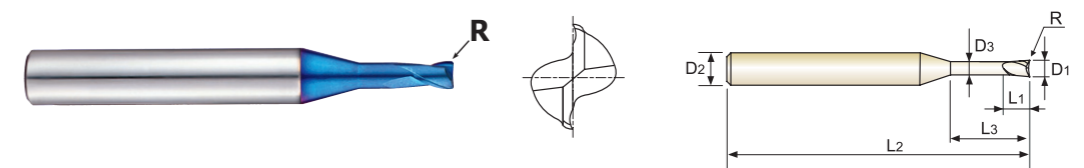

CARBIDE 2 BLUE 30° ±0.010 PLAIN P. 50

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.010)	D1	D2	L1	L3	L2	D3
G8A52005	R0.05	0.5	6	0.7	1.5	50	0.45
G8A52901	R0.05	0.5	6	0.7	3.3	50	0.45
G8A52006	R0.05	0.6	6	0.9	2	50	0.55
G8A52902	R0.05	0.6	6	0.9	4	50	0.55
G8A52008	R0.05	0.8	6	1.2	2.5	50	0.75
G8A52903	R0.05	0.8	6	1.2	5.5	50	0.75
G8A52010	R0.10	1.0	6	1.5	3.3	50	0.95
G8A52904	R0.10	1.0	6	1.5	6.7	50	0.95
G8A52012	R0.10	1.2	6	1.8	4.4	50	1.15
G8A52905	R0.10	1.2	6	1.8	8	50	1.15
G8A52015	R0.15	1.5	6	2.2	5	50	1.45
G8A52906	R0.15	1.5	6	2.2	9.7	50	1.45
G8A52020	R0.15	2.0	6	2.2	6	50	1.95
G8A52907	R0.15	2.0	6	2.2	13	50	1.95

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.012	h5

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	35	32	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○					○					○				○					

ISO Material Description	N					S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommend	○					○					◎			◎	◎	◎	◎	◎	◎	◎	◎	◎

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE MINIATURE CORNER RADIUS

PLAIN SHANK **G8A50** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

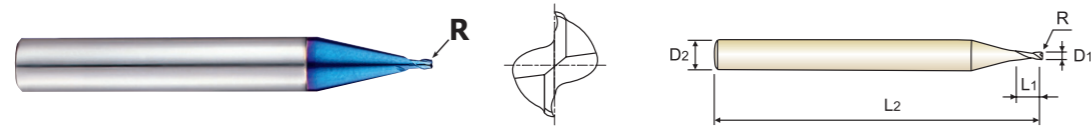

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D1	D2	L1	L2
G8A50003	-	0.3	6	0.45	50
G8A50004	-	0.4	6	0.6	50
G8A50005	R0.05	0.5	6	0.7	50
G8A50006	R0.05	0.6	6	0.9	50
G8A50008	R0.05	0.8	6	1.2	50
G8A50010	R0.10	1.0	6	1.5	50
G8A50012	R0.10	1.2	6	1.8	50
G8A50015	R0.15	1.5	6	2.2	50
G8A50020	R0.15	2.0	6	2.2	50

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.012	h5

◎ : Excellent ○ : Good



ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	30	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○					○					○				○					

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys		Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○					○					◎				◎						

BLUE-COATED SOLID CARBIDE END MILLS 4 FLUTE CORNER RADIUS with EXTENDED NECK

PLAIN SHANK **G8A47** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

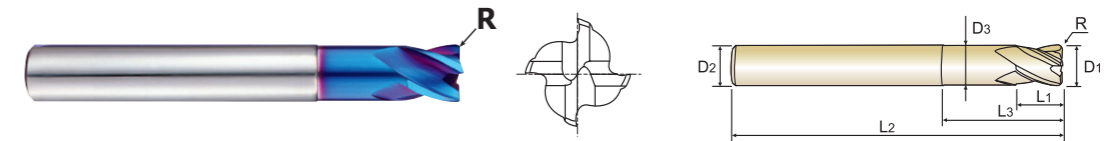

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.010)	D1	D2	L1	L3	L2	D3
G8A47916	R0.3	3.0	6	4	12	55	2.85
G8A47917	R0.3	3.0	6	4	16	55	2.85
G8A47918	R0.3	3.0	6	4	20	55	2.85
G8A47030	R0.5	3.0	6	4	10	55	2.85
G8A47901	R0.5	3.0	6	4	16	55	2.85
G8A47902	R0.5	3.0	6	4	20	55	2.85
G8A47919	R0.3	4.0	6	5	12	55	3.85
G8A47920	R0.3	4.0	6	5	16	55	3.85
G8A47921	R0.3	4.0	6	5	20	55	3.85
G8A47040	R0.5	4.0	6	5	12	55	3.85
G8A47903	R0.5	4.0	6	5	16	55	3.85
G8A47904	R0.5	4.0	6	5	20	55	3.85
G8A47922	R1.0	4.0	6	5	12	55	3.85
G8A47060	R0.5	6.0	6	7	20	60	5.85
G8A47905	R1.0	6.0	6	7	20	60	5.85
G8A47906	R1.5	6.0	6	7	20	60	5.85
G8A47910	R0.5	8.0	8	9	25	60	7.7
G8A47080	R1.0	8.0	8	9	25	60	7.7
G8A47907	R1.5	8.0	8	9	25	60	7.7
G8A47913	R2.0	8.0	8	9	25	60	7.7
G8A47911	R0.5	10.0	10	11	32	70	9.7
G8A47100	R1.0	10.0	10	11	32	70	9.7
G8A47908	R1.5	10.0	10	11	32	70	9.7
G8A47914	R2.0	10.0	10	11	32	70	9.7
G8A47912	R0.5	12.0	12	12	38	80	11.7
G8A47120	R1.0	12.0	12	12	38	80	11.7
G8A47909	R1.5	12.0	12	12	38	80	11.7
G8A47915	R2.0	12.0	12	12	38	80	11.7

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	30	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○					○					○				○					

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys		Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○					○					◎				◎						

BLUE-COATED SOLID CARBIDE END MILLS

4 FLUTE STUB LENGTH CORNER RADIUS with EXTENDED NECK PLAIN SHANK **G8A37** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

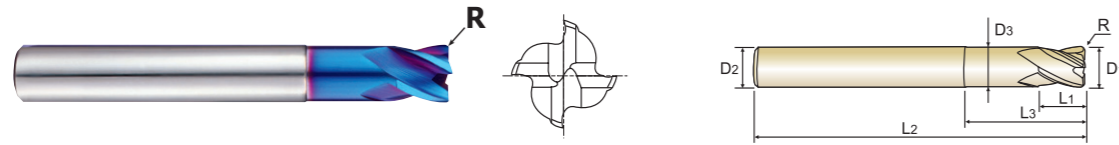

CARBIDE 4 BLUE 30° R ±0.010 R ±0.015 PLAIN P. 58

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.010)	D1	D2	L1	L3	L2	D3
G8A37010	R0.1	1.0	3	1.5	-	40	-
G8A37901	R0.1	1.0	6	1.5	-	40	-
G8A37015	R0.1	1.5	3	2.2	-	40	-
G8A37902	R0.1	1.5	6	2.2	-	40	-
G8A37020	R0.1	2.0	3	3	6	40	1.95
G8A37903	R0.1	2.0	6	3	6	40	1.95
G8A37025	R0.1	2.5	3	4	6	40	2.4
G8A37904	R0.1	2.5	6	4	6	40	2.4
G8A37030	R0.1	3.0	6	4	7	45	2.85
G8A37035	R0.1	3.5	6	5	9	45	3.35
G8A37040	R0.1	4.0	6	5	9	45	3.85
G8A37045	R0.1	4.5	6	6	10	45	4.35
G8A37050	R0.2	5.0	6	6	11	50	4.85
G8A37060	R0.2	6.0	6	7	14	50	5.85
G8A37080	R0.2	8.0	8	9	18	60	7.7
G8A37100	R0.2	10.0	10	12	25	75	9.7
G8A37120	R0.3	12.0	12	15	30	75	11.7
G8A37160	R0.3	16.0	16	18	38	90	15.7
G8A37200	R0.3	20.0	20	24	45	100	19.7

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

© : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	30	20	15	35	23	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend																				

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																					

BLUE-COATED SOLID CARBIDE END MILLS

4 FLUTE CORNER RADIUS with EXTENDED NECK PLAIN SHANK **G8B08** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.



CARBIDE 4 BLUE 30° R ±0.010 R ±0.015 PLAIN P. 52

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.010)	D1	D2	L1	L3	L2	D3
G8B0806005090	R0.5	6.0	6	9	20	90	5.85
G8B0806010090	R1.0	6.0	6	9	20	90	5.85
G8B0808005100	R0.5	8.0	8	12	25	100	7.7
G8B0808010100	R1.0	8.0	8	12	25	100	7.7
G8B0810005100	R0.5	10.0	10	15	32	100	9.7
G8B0810010100	R1.0	10.0	10	15	32	100	9.7
G8B0810020100	R2.0	10.0	10	15	32	100	9.7
G8B0812005110	R0.5	12.0	12	18	38	110	11.7
G8B0812010110	R1.0	12.0	12	18	38	110	11.7
G8B0812020110	R2.0	12.0	12	18	38	110	11.7

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

© : Excellent ○ : Good



ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron	Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	29	32	38	30	20	15	35	23	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend																				

ISO	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																					

BLUE-COATED SOLID CARBIDE END MILLS 6 FLUTE 45° HELIX CORNER RADIUS with EXTENDED NECK

PLAIN SHANK **G8A39** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

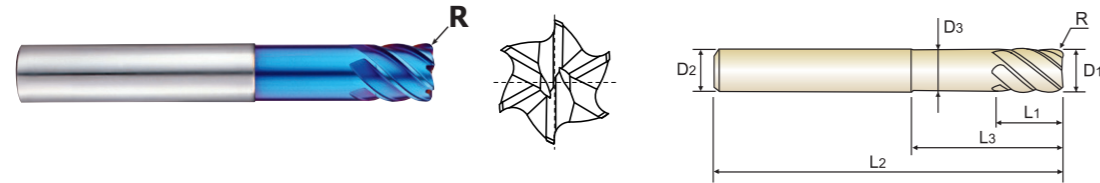


EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (± 0.010)	D ₁	D ₂	L ₁	L ₃	L ₂	D ₃
G8A39916	R0.25	6.0	6	6	14	50	5.85
G8A39060	R0.5	6.0	6	6	14	50	5.85
G8A39901	R0.5	6.0	6	13	-	70	-
* G8A39910	R0.5	6.0	6	26	-	70	-
G8A39080	R0.5	8.0	8	8	24	60	7.7
G8A39902	R0.5	8.0	8	19	-	90	-
* G8A39911	R0.5	8.0	8	36	-	90	-
G8A39903	R0.5	10.0	10	22	-	100	-
G8A39100	R1.0	10.0	10	10	30	70	9.7
G8A39904	R1.0	10.0	10	22	-	100	-
* G8A39912	R1.0	10.0	10	46	-	100	-
G8A39905	R0.5	12.0	12	26	-	110	-
G8A39120	R1.0	12.0	12	12	30	75	11.7
G8A39906	R1.0	12.0	12	26	-	110	-
* G8A39913	R1.0	12.0	12	56	-	110	-
G8A39160	R1.0	16.0	16	32	-	130	-
G8A39907	R1.5	16.0	16	32	-	130	-
* G8A39914	R1.5	16.0	16	66	-	130	-
G8A39200	R1.0	20.0	20	38	-	140	-
G8A39908	R1.5	20.0	20	38	-	140	-
G8A39909	R2.0	20.0	20	38	-	140	-
* G8A39915	R2.0	20.0	20	76	-	140	-

Unit : mm

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE for RIB PROCESSING

PLAIN SHANK **G8A45** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

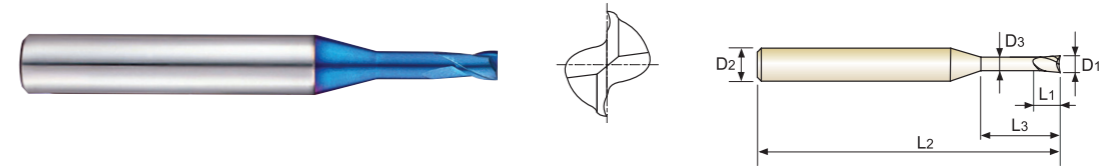

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D ₁	D ₂	L ₁	L ₃	L ₂	D ₃
G8A45863	0.1	4	0.15	0.3	45	0.085
G8A45864	0.1	4	0.15	0.5	45	0.085
G8A45002	0.2	4	0.3	0.5	45	0.17
G8A45815	0.2	4	0.3	1	45	0.17
G8A45816	0.2	4	0.3	1.5	45	0.17
G8A45003	0.3	4	0.45	1	45	0.27
G8A45844	0.3	4	0.45	1.5	45	0.27
G8A45817	0.3	4	0.45	2	45	0.27
G8A45818	0.3	4	0.45	3	45	0.27
G8A45842	0.3	4	0.45	4	45	0.27
G8A45843	0.4	4	0.6	1	45	0.37
G8A45004	0.4	4	0.6	2	45	0.37
G8A45984	0.4	4	0.6	3	45	0.37
G8A45985	0.4	4	0.6	4	45	0.37
G8A45986	0.4	4	0.6	5	45	0.37
G8A45005	0.5	4	0.7	2	45	0.45
G8A45861	0.5	4	0.7	2.5	45	0.45
G8A45988	0.5	4	0.7	4	45	0.45
G8A45989	0.5	4	0.7	6	45	0.45
G8A45990	0.5	4	0.7	8	45	0.45
G8A45006	0.6	4	0.9	2	45	0.55
G8A45860	0.6	4	0.9	3	45	0.55

Unit : mm

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

▶ NEXT PAGE

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

* Mill Dia. Tolerance(mm) for Extra Long Type : 0~-0.03

◎ : Excellent ○ : Good


ISO	P										M				K														
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron								
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20									
VDI 3323																													
HRC	13	25	28	32	38	42	48	52	58	63	68	73	78	83	88	93	98	103	108	113									
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230									
Recommend					○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S					H														
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron										
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41									
VDI 3323																														
HRC																														
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550									
Recommend											◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE for RIB PROCESSING

PLAIN SHANK **G8A45** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

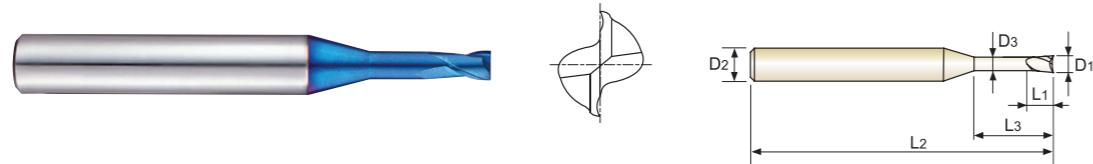

P. 53-54

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
G8A45991	0.6	4	0.9	4	45	0.55
G8A45992	0.6	4	0.9	6	45	0.55
G8A45993	0.6	4	0.9	8	45	0.55
G8A45819	0.6	4	0.9	10	45	0.55
G8A45862	0.8	4	1.2	2	45	0.75
G8A45008	0.8	4	1.2	4	45	0.75
G8A45908	0.8	4	1.2	6	45	0.75
G8A45909	0.8	4	1.2	8	45	0.75
G8A45994	0.8	4	1.2	10	45	0.75
G8A45995	0.8	4	1.2	12	45	0.75
G8A45996	1.0	4	1.5	4	45	0.95
G8A45010	1.0	4	1.5	6	45	0.95
G8A45912	1.0	4	1.5	8	45	0.95
G8A45913	1.0	4	1.5	10	45	0.95
G8A45914	1.0	4	1.5	12	45	0.95
G8A45997	1.0	4	1.5	16	50	0.95
G8A45998	1.0	4	1.5	20	55	0.95
G8A45012	1.2	4	1.8	6	45	1.15
G8A45915	1.2	4	1.8	8	45	1.15
G8A45916	1.2	4	1.8	10	45	1.15
G8A45917	1.2	4	1.8	12	45	1.15
G8A45999	1.2	4	1.8	16	50	1.15

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.012	h5

◎ : Excellent ○ : Good



ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	30	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○										○		○		○		○		○	

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○					○					◎		◎	○	◎						

BLUE-COATED SOLID CARBIDE END MILLS 2 FLUTE for RIB PROCESSING

PLAIN SHANK **G8A45** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

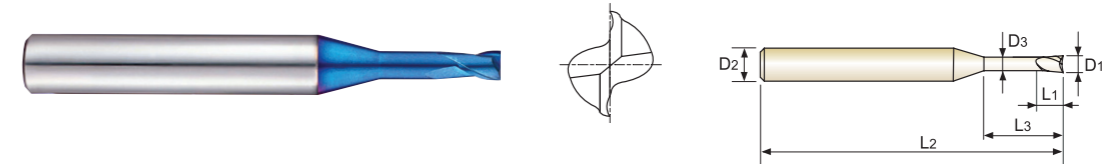

P. 53-54

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
G8A45015	1.5	4	2.3	6	45	1.45
G8A45923	1.5	4	2.3	8	45	1.45
G8A45924	1.5	4	2.3	10	45	1.45
G8A45925	1.5	4	2.3	12	45	1.45
G8A45926	1.5	4	2.3	14	50	1.45
G8A45927	1.5	4	2.3	16	50	1.45
G8A45928	1.5	4	2.3	18	55	1.45
G8A45810	1.5	4	2.3	20	55	1.45
G8A45958	2.0	4	3.0	6	45	1.95
G8A45020	2.0	4	3.0	8	45	1.95
G8A45959	2.0	4	3.0	10	45	1.95
G8A45960	2.0	4	3.0	12	45	1.95
G8A45961	2.0	4	3.0	14	50	1.95
G8A45962	2.0	4	3.0	16	50	1.95
G8A45963	2.0	4	3.0	18	55	1.95
G8A45964	2.0	4	3.0	20	55	1.95
G8A45966	2.0	4	3.0	25	60	1.95
G8A45814	2.0	4	3.0	30	70	1.95
G8A45975	3.0	6	4.5	10	45	2.85
G8A45976	3.0	6	4.5	12	45	2.85
G8A45977	3.0	6	4.5	14	50	2.85
G8A45978	3.0	6	4.5	16	55	2.85

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.012	h5

◎ : Excellent ○ : Good


ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	30	15	35	15	23	10	10	26	3	25	19	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○										○		○		○		○		○	

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○					○					◎		◎	○	◎						

BLUE-COATED SOLID CARBIDE END MILLS 4 FLUTE with EXTENDED NECK

PLAIN SHANK **G8A02** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting and high speed cutting thanks to the newly-developed raw material and new coating
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible due to the reduced neck.
- ▶ Corner radius for preventing chipping in high speed machining.
- ▶ Higher wear-resistance.

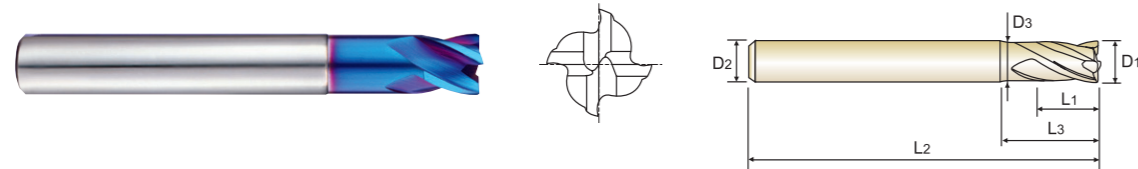

Unit : mm

EDP No.	Mill Diameter		Shank Diameter		Length of Cut		Length Below Shank		Overall Length		Neck Diameter	
	D1	D2	D2	D3	L1	L2	L3	L3	L2	L2	D3	D3
G8A02010	1.0	6	6	0.95	1.5	50	3	3	50	0.95	0.95	0.95
G8A02020	2.0	6	6	1.95	2	50	5	5	50	1.95	1.95	1.95
G8A02030	3.0	6	6	2.85	3	55	8	8	55	2.85	2.85	2.85
G8A02040	4.0	6	6	3.85	4	55	10	10	55	3.85	3.85	3.85
G8A02050	5.0	6	6	4.85	5	55	13	13	55	4.85	4.85	4.85
G8A02060	6.0	6	6	5.85	6	55	15	15	55	5.85	5.85	5.85
G8A02080	8.0	8	8	7.7	8	65	20	20	65	7.7	7.7	7.7
G8A02100	10.0	10	10	9.7	10	75	25	25	75	9.7	9.7	9.7
G8A02120	12.0	12	12	11.7	12	85	28	28	85	11.7	11.7	11.7
G8A02160	16.0	16	16	15.7	16	90	32	32	90	15.7	15.7	15.7
G8A02200	20.0	20	20	19.7	20	105	40	40	105	19.7	19.7	19.7

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Size	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	0 ~ - 0.012	h5
over Ø6	0 ~ - 0.015	

◎ : Excellent ○ : Good



ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	29	32	38	35	35	15	23	10	10	26	3	25	21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○					○					○				○						

ISO Material Description	N										S					H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommend	○										○					◎		◎		○		◎	

BLUE-COATED SOLID CARBIDE END MILLS 6&8 FLUTE 45° HELIX LONG LENGTH

PLAIN SHANK **G8D63** SERIES

- ▶ Designed to machine high hardened materials.
- ▶ Designed for high abrasion resistance thanks to negative rake angle.
- ▶ Excellent side-cutting of press mold field.

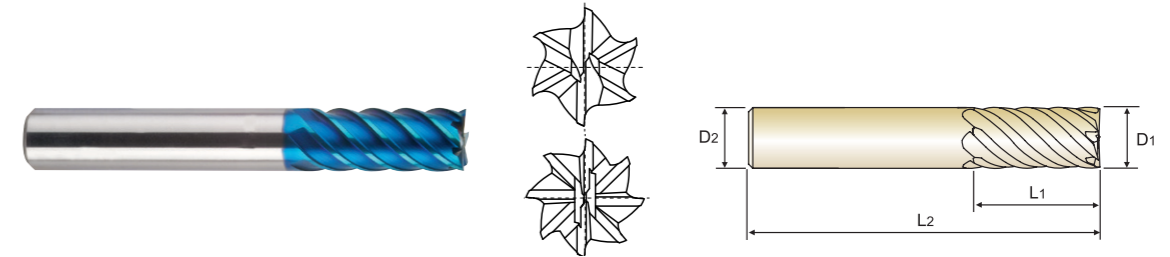


Unit : mm

EDP No.	Mill Diameter		Shank Diameter		Length of Cut		Overall Length		No. of Flute	
	D1	D2	D2	D3	L1	L2	L2	L2	No. of Flute	No. of Flute
G8D63060	6.0	6	6	6	13	57	6	57	6	6
G8D63080	8.0	8	8	8	19	63	6	63	6	6
G8D63100	10.0	10	10	10	22	72	6	72	6	6
G8D63120	12.0	12	12	12	26	83	6	83	6	6
G8D63140	14.0	14	14	14	26	83	6	83	6	6
G8D63160	16.0	16	16	16	32	92	6	92	6	6
G8D63180	18.0	18	18	18	32	92	8	92	8	8
G8D63200	20.0	20	20	20	38	104	8	104	8	8
G8D63250	25.0	25	25	25	44	104	8	104	8	8

Due to the characteristics of the blue decoration layer, it might be erased during short-term use and the color layer may become non-uniform. However, this doesn't affect the performance of the tool.

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.02	h5

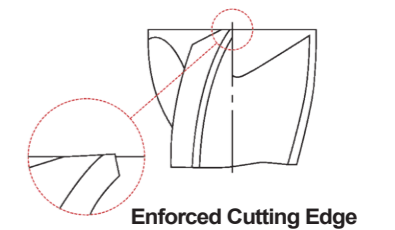

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	29	32	38	35	35	15	23	10	10	26	3	25	21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○					○					○				○						

ISO Material Description	N										S					H							
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommend	○										○					◎		◎		○		◎	


G8A46, G8A54 SERIES

2 FLUTE BALL NOSE FOR RIB PROCESSING

Vc = m/min.
 fz = mm/tooth
 RPM = rev./min.
 FEED = mm/min.
 Ap = mm

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)				
				0.2	0.3	0.4	0.5	0.6
P	5	Non-alloy steel	Vc	31	45~47	60~63	50~55	50~56
			fz	0.003~0.004	0.005~0.005	0.007~0.008	0.006~0.013	0.007~0.015
			RPM	50000	48000~50000	48000~50000	31900~35200	26400~29700
	8-9	Low alloy steel	Vc	31	45~47	60~63	54~78	54~77
			fz	0.003~0.004	0.005~0.005	0.007~0.008	0.006~0.013	0.007~0.015
			RPM	50000	48000~50000	48000~50000	34100~49500	28600~40700
	11.1 - 11.2	High alloyed steel and tool steel	Vc	31	45~47	60~63	54~78	54~77
			fz	0.003~0.004	0.005~0.005	0.007~0.008	0.006~0.013	0.007~0.015
			RPM	50000	48000~50000	48000~50000	34100~49500	28600~40700
H	38.1 - 38.2	Hardened steel	Vc	31	45~47	60~63	50~55	50~56
			fz	0.003~0.003	0.004~0.005	0.005~0.006	0.006~0.008	0.007~0.010
			RPM	50000	48000~50000	48000~50000	31900~35200	26400~29700
	39.1	Hardened steel	Vc	31	43~47	58~63	50~55	50~56
			fz	0.009~0.011	0.017~0.017	0.017~0.018	0.028~0.027	0.030~0.032
			RPM	50000	46000~50000	46000~50000	31900~35200	26400~29700
	39.2	Hardened steel	Vc	31	43~47	58~63	50~55	50~56
			fz	0.009~0.011	0.017~0.017	0.017~0.018	0.028~0.027	0.030~0.032
			RPM	50000	46000~50000	46000~50000	31900~35200	26400~29700
40	Chilled Cast Iron	Vc	31	45~47	60~63	54~78	54~77	
		fz	0.003~0.004	0.005~0.005	0.007~0.008	0.006~0.013	0.007~0.015	
		RPM	50000	48000~50000	48000~50000	34100~49500	28600~40700	
41	Hardened Cast Iron	Vc	31	45~47	60~63	50~55	50~56	
		fz	0.003~0.003	0.004~0.005	0.005~0.006	0.006~0.008	0.007~0.010	
		RPM	50000	48000~50000	48000~50000	31900~35200	26400~29700	

▶ NEXT PAGE




G8A46, G8A54 SERIES

2 FLUTE BALL NOSE FOR RIB PROCESSING

Vc = m/min.
 fz = mm/tooth
 RPM = rev./min.
 FEED = mm/min.
 Ap = mm


VDI 3323	Parameter	Diameter (Ø)						
		0.8	1.0	1.2	1.5	2.0	3.0	4.0
5	Vc	50~55	48~55	45~53	47~54	50~55	50~55	50~55
	fz	0.010~0.020	0.012~0.024	0.016~0.027	0.020~0.035	0.027~0.047	0.045~0.088	0.055~0.115
	RPM	19800~22000	15400~17600	12000~14000	10000~11500	7900~8800	5300~5800	3950~4400
	FEED	460~550	470~540	460~540	440~540	470~530	590~650	550~620
8-9	Vc	55~77	55~76	54~70	52~67	53~69	54~77	54~78
	fz	0.010~0.020	0.012~0.024	0.016~0.027	0.020~0.035	0.027~0.047	0.045~0.088	0.055~0.115
	RPM	22000~30800	17600~24200	14300~18700	11000~14300	8500~11000	5700~8200	4300~6200
	FEED	640~890	600~850	590~780	580~760	590~800	730~1000	680~990
11.1 - 11.2	Vc	55~77	55~76	54~70	52~67	53~69	54~77	54~78
	fz	0.010~0.020	0.012~0.024	0.016~0.027	0.020~0.035	0.027~0.047	0.045~0.088	0.055~0.115
	RPM	22000~30800	17600~24200	14300~18700	11000~14300	8500~11000	5700~8200	4300~6200
	FEED	640~890	600~850	590~780	580~760	590~800	730~1000	680~990
38.1 - 38.2	Vc	50~55	48~55	45~53	47~54	50~55	50~55	50~55
	fz	0.010~0.014	0.013~0.018	0.016~0.023	0.019~0.027	0.027~0.034	0.051~0.061	0.063~0.078
	RPM	19800~22000	15400~17600	12000~14000	10000~11500	7900~8800	5300~5800	3950~4400
	FEED	460~550	470~540	460~540	440~540	470~530	590~650	550~620
39.1	Vc	50~55	48~55	45~53	47~54	50~55	50~55	50~55
	fz	0.044~0.045	0.057~0.057	0.070~0.069	0.084~0.083	0.111~0.109	0.208~0.214	0.275~0.259
	RPM	19800~22000	15400~17600	12000~14000	10000~11500	7900~8800	5300~5800	3850~4400
	FEED	440~500	440~500	420~480	420~480	440~480	550~620	530~570
39.2	Vc	50~55	48~55	45~53	47~54	50~55	50~55	50~55
	fz	0.044~0.045	0.057~0.057	0.070~0.069	0.084~0.083	0.111~0.109	0.208~0.214	0.275~0.259
	RPM	19800~22000	15400~17600	12000~14000	10000~11500	7900~8800	5300~5800	3850~4400
	FEED	440~500	440~500	420~480	420~480	440~480	550~620	530~570
40	Vc	55~77	55~76	54~70	52~67	53~69	54~77	54~78
	fz	0.010~0.020	0.012~0.024	0.016~0.027	0.020~0.035	0.027~0.047	0.045~0.088	0.055~0.115
	RPM	22000~30800	17600~24200	14300~18700	11000~14300	8500~11000	5700~8200	4300~6200
	FEED	640~890	600~850	590~780	580~760	590~800	730~1000	680~990
41	Vc	50~55	48~55	45~53	47~54	50~55	50~55	50~55
	fz	0.010~0.014	0.013~0.018	0.016~0.023	0.019~0.027	0.027~0.034	0.051~0.061	0.063~0.078
	RPM	19800~22000	15400~17600	12000~14000	10000~11500	7900~8800	5300~5800	3950~4400
	FEED	460~550	470~540	460~540	440~540	470~530	590~650	550~620



G8A59 SERIES 3 FLUTE BALL NOSE

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.


ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)								
						3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0
P	5	Non-alloy steel	0.05D	0.02D	Vc	300	305	315	340	340	340	340	335	340
					fz	0.09	0.107	0.121	0.159	0.181	0.202	0.225	0.229	0.222
					RPM	31831	24271	20054	18038	13528	10823	9019	6665	5411
	8-9	Low alloy steel	0.05D	0.02D	Vc	300	305	315	340	340	340	340	335	340
					fz	0.09	0.107	0.121	0.159	0.181	0.202	0.225	0.229	0.222
					RPM	31831	24271	20054	18038	13528	10823	9019	6665	5411
	11.1 - 11.2	High alloyed steel, and tool steel	0.05D	0.02D	Vc	300	305	315	340	340	340	340	335	340
					fz	0.09	0.107	0.121	0.159	0.181	0.202	0.225	0.229	0.222
					RPM	31831	24271	20054	18038	13528	10823	9019	6665	5411
H	38.1 - 38.2	Hardened steel	0.05D	0.02D	Vc	255	255	265	285	285	285	285	285	285
					fz	0.072	0.09	0.108	0.136	0.155	0.168	0.187	0.19	0.192
					RPM	27056	20292	16870	15120	11340	9072	7560	5670	4536
	39.1	Hardened steel	0.05D	0.02D	Vc	185	185	195	230	230	230	230	230	230
					fz	0.072	0.087	0.099	0.123	0.144	0.156	0.173	0.18	0.18
					RPM	19629	14722	12414	12202	9151	7321	6101	4576	3661
	39.2	Hardened steel	0.05D	0.02D	Vc	175	180	185	210	210	210	210	210	205
					fz	0.072	0.086	0.099	0.115	0.134	0.144	0.145	0.144	0.145
					RPM	18568	14324	11777	11141	8356	6685	5570	4178	3263
	39.3	Hardened steel	0.05D	0.02D	Vc	120	120	125	145	145	145	145	145	145
					fz	0.072	0.087	0.099	0.108	0.125	0.144	0.144	0.144	0.143
					RPM	12732	9549	7958	7692	5769	4615	3846	2885	2308
	40	Chilled Cast Iron	0.05D	0.02D	Vc	300	305	315	340	340	340	340	335	340
					fz	0.09	0.107	0.121	0.159	0.181	0.202	0.225	0.229	0.222
					RPM	31831	24271	20054	18038	13528	10823	9019	6665	5411
	41	Hardened Cast Iron	0.05D	0.02D	Vc	255	255	265	285	285	285	285	285	285
					fz	0.072	0.09	0.108	0.136	0.155	0.168	0.187	0.19	0.192
					RPM	27056	20292	16870	15120	11340	9072	7560	5670	4536



G8D62 SERIES 4 FLUTE BALL NOSE

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)								
						3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0
P	5	Non-alloy steel	0.05D	0.02D	Vc	340	340	340	340	340	340	340	340	340
					fz	0.071	0.08	0.09	0.101	0.116	0.128	0.145	0.144	0.144
					RPM	36075	27056	21645	18038	13528	10823	9019	6764	5411
	8-9	Low alloy steel	0.05D	0.02D	Vc	340	340	340	340	340	340	340	340	340
					fz	0.071	0.08	0.09	0.101	0.116	0.128	0.145	0.144	0.144
					RPM	36075	27056	21645	18038	13528	10823	9019	6764	5411
	11.1 - 11.2	High alloyed steel, and tool steel	0.05D	0.02D	Vc	340	340	340	340	340	340	340	340	340
					fz	0.071	0.08	0.09	0.101	0.116	0.128	0.145	0.144	0.144
					RPM	36075	27056	21645	18038	13528	10823	9019	6764	5411
H	38.1 - 38.2	Hardened steel	0.05D	0.02D	Vc	285	285	280	285	285	285	285	285	285
					fz	0.06	0.07	0.081	0.092	0.103	0.111	0.125	0.129	0.126
					RPM	30239	22680	17825	15120	11340	9072	7560	5670	4536
	39.1	Hardened steel	0.05D	0.02D	Vc	230	230	230	230	230	230	230	230	230
					fz	0.05	0.06	0.071	0.082	0.096	0.104	0.115	0.119	0.119
					RPM	24404	18303	14642	12202	9151	7321	6101	4576	3661
	39.2	Hardened steel	0.05D	0.02D	Vc	210	210	210	210	210	210	210	210	205
					fz	0.045	0.055	0.067	0.077	0.089	0.095	0.097	0.096	0.096
					RPM	22282	16711	13369	11141	8356	6685	5570	4178	3263
	39.3	Hardened steel	0.05D	0.02D	Vc	145	145	145	145	145	145	145	145	140
					fz	0.04	0.05	0.062	0.072	0.082	0.096	0.094	0.096	0.097
					RPM	15385	11539	9231	7692	5769	4615	3846	2885	2228
	40	Chilled Cast Iron	0.05D	0.02D	Vc	340	340	340	340	340	340	340	340	340
					fz	0.071	0.08	0.09	0.101	0.116	0.128	0.145	0.144	0.144
					RPM	36075	27056	21645	18038	13528	10823	9019	6764	5411
	41	Hardened Cast Iron	0.05D	0.02D	Vc	285	285	280	285	285	285	285	285	285
					fz	0.06	0.07	0.081	0.092	0.103	0.111	0.125	0.129	0.126
					RPM	30239	22680	17825	15120	11340	9072	7560	5670	4536




G8A52 SERIES

2 FLUTE CORNER RADIUS FOR RIB PROCESSING - SLOTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.
Ap = mm

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)							
				0.5	0.6	0.8	1.0	1.2	1.5	2.0	
P	5	Non-alloy steel	Vc	40~52	39~66	41~66	39~59	39~66	43~83	40~66	
			fz	0.006~0.009	0.005~0.013	0.007~0.018	0.009~0.022	0.010~0.028	0.012~0.046	0.016~0.045	
			RPM	25650~33000	20900~35200	16150~26400	12300~18700	10450~17600	9100~17600	6350~10550	
	8-9	Low alloy steel	Vc	40~52	39~66	41~66	39~59	39~66	43~83	40~66	
			fz	0.006~0.009	0.005~0.013	0.007~0.018	0.009~0.022	0.010~0.028	0.012~0.046	0.016~0.045	
			RPM	25650~33000	20900~35200	16150~26400	12300~18700	10450~17600	9100~17600	6350~10550	
	11.1 - 11.2	High alloyed steel, and tool steel	Vc	40~52	39~66	41~66	39~59	39~66	43~83	40~66	
			fz	0.006~0.009	0.005~0.013	0.007~0.018	0.009~0.022	0.010~0.028	0.012~0.046	0.016~0.045	
			RPM	25650~33000	20900~35200	16150~26400	12300~18700	10450~17600	9100~17600	6350~10550	
	H	38.1 - 38.2	Hardened steel	Vc	37~41	38~41	38~42	33~36	34~38	33~38	38~42
				fz	0.005~0.007	0.004~0.007	0.006~0.010	0.008~0.013	0.009~0.015	0.011~0.020	0.015~0.025
				RPM	23750~26000	19900~22000	15200~16700	10500~11500	9100~10000	7000~8000	6100~6700
39.1 - 39.3		Hardened steel	Vc	22~28	22~29	23~29	20~25	20~26	20~26	23~30	
			fz	0.016~0.014	0.017~0.015	0.024~0.021	0.032~0.029	0.037~0.033	0.047~0.042	0.056~0.051	
			RPM	14200~18000	11900~15500	9000~11700	6300~8050	5400~7000	4300~5500	3600~4700	
40		Chilled Cast Iron	Vc	40~52	39~66	41~66	39~59	39~66	43~83	40~66	
			fz	0.006~0.009	0.005~0.013	0.007~0.018	0.009~0.022	0.010~0.028	0.012~0.046	0.016~0.045	
			RPM	25650~33000	20900~35200	16150~26400	12300~18700	10450~17600	9100~17600	6350~10550	
41		Hardened Cast Iron	Vc	37~41	38~41	38~42	33~36	34~38	33~38	38~42	
			fz	0.005~0.007	0.004~0.007	0.006~0.010	0.008~0.013	0.009~0.015	0.011~0.020	0.015~0.025	
			RPM	23750~26000	19900~22000	15200~16700	10500~11500	9100~10000	7000~8000	6100~6700	




G8A50 SERIES

2 FLUTE CORNER RADIUS - SLOTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)								
						0.3	0.4	0.5	0.6	0.8	1.0	1.2	1.5	2.0
P	5	Non-alloy steel	1.0D	0.05D	Vc	45	65	80	95	125	150	160	175	210
					fz	0.002	0.002	0.004	0.005	0.006	0.008	0.009	0.011	0.013
					RPM	47746	51725	50930	50399	49736	47746	42441	37136	33423
	8-9	Low alloy steel	1.0D	0.05D	Vc	45	65	80	95	125	150	160	175	210
					fz	0.002	0.002	0.004	0.005	0.006	0.008	0.009	0.011	0.013
					RPM	47746	51725	50930	50399	49736	47746	42441	37136	33423
	11.1	High alloyed steel, and tool steel	1.0D	0.05D	Vc	45	65	80	95	125	150	160	175	210
					fz	0.002	0.002	0.004	0.005	0.006	0.008	0.009	0.011	0.013
					RPM	47746	51725	50930	50399	49736	47746	42441	37136	33423
	11.2	High alloyed steel, and tool steel	1.0D	0.05D	Vc	40	55	70	85	100	120	130	145	165
					fz	0.002	0.002	0.003	0.004	0.006	0.008	0.009	0.011	0.013
					RPM	42441	43768	44563	45094	39789	38197	34484	30770	26261
H	38.1	Hardened steel	1.0D	0.05D	Vc	40	55	70	85	100	120	130	145	165
					fz	0.002	0.002	0.003	0.004	0.006	0.008	0.009	0.011	0.013
					RPM	42441	43768	44563	45094	39789	38197	34484	30770	26261
	38.2	Hardened steel	1.0D	0.05D	Vc	40	50	65	75	85	100	110	120	
					fz	0.001	0.002	0.003	0.004	0.005	0.007	0.008	0.01	
					RPM	42441	39789	41380	39789	29842	25465	22547	21221	
	39.1	Hardened steel	1.0D	0.02D	Vc	30	40	50	55	65	75	80	90	
					fz	0.001	0.001	0.002	0.003	0.004	0.005	0.006	0.007	
					RPM	31831	31831	31831	29178	25863	20690	19894	16977	
	39.2	Hardened steel	1.0D	0.02D	Vc	25	30	40	45	50	55	60	70	
					fz	0.001	0.001	0.002	0.002	0.003	0.004	0.005	0.006	
					RPM	26526	23873	25465	23873	19894	15915	14589	12732	
40	Chilled Cast Iron	1.0D	0.05D	Vc	40	55	70	85	100	120	130	145	165	
				fz	0.002	0.002	0.003	0.004	0.006	0.008	0.009	0.011		
				RPM	42441	43768	44563	45094	39789	38197	34484	30770		
41	Hardened Cast Iron	1.0D	0.05D	Vc	40	50	65	75	85	100	110	120		
				fz	0.001	0.002	0.003	0.004	0.005	0.007	0.008	0.01		
				RPM	42441	39789	41380	39789	29842	25465	22547	21221		




G8A47, G8B08 SERIES

4 FLUTE CORNER RADIUS - SIDE CUTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)										
						1.0	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0
P	5	Non-alloy steel	0.03D	1.0D	Vc	150	210	205	210	245	245	250	245	250	245	245
					fz	0.006	0.011	0.016	0.022	0.025	0.03	0.038	0.045	0.053	0.061	0.067
					RPM	47746	33423	21751	16711	15597	12998	9947	7799	6631	4874	3899
	8-9	Low alloy steel	0.03D	1.0D	Vc	150	210	205	210	245	245	250	245	250	245	245
					fz	0.006	0.011	0.016	0.022	0.025	0.03	0.038	0.045	0.053	0.061	0.067
					RPM	47746	33423	21751	16711	15597	12998	9947	7799	6631	4874	3899
	11.1	High alloyed steel, and tool steel	0.03D	1.0D	Vc	150	210	205	210	245	245	250	245	250	245	245
					fz	0.006	0.011	0.016	0.022	0.025	0.03	0.038	0.045	0.053	0.061	0.067
					RPM	47746	33423	21751	16711	15597	12998	9947	7799	6631	4874	3899
	11.2	High alloyed steel, and tool steel	0.03D	1.0D	Vc	120	165	165	165	195	195	195	195	200	195	195
					fz	0.006	0.01	0.014	0.02	0.024	0.027	0.035	0.041	0.048	0.056	0.063
					RPM	38197	26261	17507	13130	12414	10345	7759	6207	5305	3879	3104
H	38.1	Hardened steel	0.03D	1.0D	Vc	120	165	165	165	195	195	195	195	200	195	195
					fz	0.006	0.01	0.014	0.02	0.024	0.027	0.035	0.041	0.048	0.056	0.063
					RPM	38197	26261	17507	13130	12414	10345	7759	6207	5305	3879	3104
	38.2	Hardened steel	0.03D	1.0D	Vc	80	110	110	110	130	130	130	130	130	130	130
					fz	0.006	0.01	0.015	0.02	0.024	0.028	0.035	0.041	0.048	0.056	0.063
					RPM	25465	17507	11671	8754	8276	6897	5173	4138	3448	2586	2069
	39.1	Hardened steel	0.03D	1.0D	Vc	65	90	90	90	100	100	100	100	100	100	100
					fz	0.004	0.007	0.011	0.015	0.018	0.021	0.026	0.03	0.036	0.042	0.048
					RPM	20690	14324	9549	7162	6366	5305	3979	3183	2653	1989	1592
	39.2	Hardened steel	0.03D	1.0D	Vc	50	70	70	70	80	80	80	80	80	80	80
					fz	0.003	0.006	0.009	0.012	0.015	0.017	0.021	0.024	0.029	0.034	0.038
					RPM	15915	11141	7427	5570	5093	4244	3183	2546	2122	1592	1273
39.3	Hardened steel	0.03D	1.0D	Vc	40	60	60	60	70	70	70	70	70	70	70	
				fz	0.003	0.005	0.007	0.01	0.012	0.014	0.017	0.02	0.024	0.029	0.033	
				RPM	12732	9549	6366	4775	4456	3714	2785	2228	1857	1393	1114	
40	Chilled Cast Iron	0.03D	1.0D	Vc	120	165	165	165	195	195	195	195	200	195	195	
				fz	0.006	0.01	0.014	0.02	0.024	0.027	0.035	0.041	0.048	0.056	0.063	
				RPM	38197	26261	17507	13130	12414	10345	7759	6207	5305	3879	3104	
41	Hardened Cast Iron	0.03D	1.0D	Vc	80	110	110	110	130	130	130	130	130	130	130	
				fz	0.006	0.01	0.015	0.02	0.024	0.028	0.035	0.041	0.048	0.056	0.063	
				RPM	25465	17507	11671	8754	8276	6897	5173	4138	3448	2586	2069	




G8A45 SERIES

2 FLUTE for RIB PROCESSING - SLOTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)						
				0.2	0.3	0.4	0.5	0.6	0.8	
P	5	Non-alloy steel	Vc	31	41~47	39~63	40~52	39~66	41~66	
			fz	0.003~0.004	0.004~0.004	0.006~0.006	0.007~0.007	0.008~0.008	0.011~0.011	
			RPM	50000	43000~50000	31400~50000	25650~33000	20900~35200	16150~26400	
	8-9	Low alloy steel	Vc	31	41~47	39~63	40~52	39~66	41~66	
			fz	0.003~0.004	0.004~0.004	0.006~0.006	0.007~0.007	0.008~0.008	0.011~0.011	
			RPM	50000	43000~50000	31400~50000	25650~33000	20900~35200	16150~26400	
	11.1 - 11.2	High alloyed steel, and tool steel	Vc	31	41~47	39~63	40~52	39~66	41~66	
			fz	0.003~0.004	0.004~0.004	0.006~0.006	0.007~0.007	0.008~0.008	0.011~0.011	
			RPM	50000	43000~50000	31400~50000	25650~33000	20900~35200	16150~26400	
	H	38.1 - 38.2	Hardened steel	Vc	31	38~44	38~44	37~41	38~41	38~42
				fz	0.003~0.003	0.003~0.003	0.005~0.005	0.006~0.006	0.007~0.007	0.009~0.009
				RPM	50000	39900~46200	30500~35200	23750~26000	19900~22000	15200~16700
39.1 - 39.2		Hardened steel	Vc	31	23~30	23~31	22~28	22~29	23~29	
			fz	0.002~0.003	0.002~0.003	0.003~0.004	0.004~0.004	0.004~0.004	0.006~0.005	
			RPM	50000	23900~32300	18300~24600	14200~18000	11900~15500	9000~11700	
40		Chilled Cast Iron	Vc	31	41~47	39~63	40~52	39~66	41~66	
			fz	0.003~0.004	0.004~0.004	0.006~0.006	0.007~0.007	0.008~0.008	0.011~0.011	
			RPM	50000	43000~50000	31400~50000	25650~33000	20900~35200	16150~26400	
41		Hardened Cast Iron	Vc	31	38~44	38~44	37~41	38~41	38~42	
			fz	0.003~0.003	0.003~0.003	0.005~0.005	0.006~0.006	0.007~0.007	0.009~0.009	
			RPM	50000	39900~46200	30500~35200	23750~26000	19900~22000	15200~16700	


▶ NEXT PAGE



G8A45 SERIES 2 FLUTE for RIB PROCESSING - SLOTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)						
				1.0	1.2	1.5	2.0	3.0	4.0	
P	5	Non-alloy steel	Vc	39~59	39~66	43~83	40~66	41~66	40~67	
			fz	0.014~0.014	0.017~0.017	0.024~0.024	0.027~0.027	0.064~0.064	0.063~0.064	
			RPM	12300~18700	10450~17600	9100~17600	6350~10550	4300~7050	3200~5300	
	8-9	Low alloy steel	Vc	39~59	39~66	43~83	40~66	41~66	40~67	
			fz	0.014~0.014	0.017~0.017	0.024~0.024	0.027~0.027	0.064~0.064	0.063~0.064	
			RPM	12300~18700	10450~17600	9100~17600	6350~10550	4300~7050	3200~5300	
	11.1 - 11.2	High alloyed steel, and tool steel	Vc	39~59	39~66	43~83	40~66	41~66	40~67	
			fz	0.014~0.014	0.017~0.017	0.024~0.024	0.027~0.027	0.064~0.064	0.063~0.064	
			RPM	12300~18700	10450~17600	9100~17600	6350~10550	4300~7050	3200~5300	
	H	38.1 - 38.2	Hardened steel	Vc	33~36	34~38	33~38	38~42	38~43	38~43
				fz	0.012~0.012	0.014~0.014	0.018~0.018	0.022~0.022	0.056~0.056	0.056~0.056
				RPM	10500~11500	9100~10000	7000~8000	6100~6700	3990~4600	3000~3400
39.1 - 39.2		Hardened steel	Vc	20~25	20~26	20~26	23~30	23~30	23~30	
			fz	0.008~0.007	0.009~0.008	0.012~0.01	0.014~0.013	0.022~0.048	0.021~0.048	
			RPM	6300~8050	5400~7000	4300~5500	3600~4700	2400~3200	1800~2400	
40		Chilled Cast Iron	Vc	39~59	39~66	43~83	40~66	41~66	40~67	
			fz	0.014~0.014	0.017~0.017	0.024~0.024	0.027~0.027	0.064~0.064	0.063~0.064	
			RPM	12300~18700	10450~17600	9100~17600	6350~10550	4300~7050	3200~5300	
41		Hardened Cast Iron	Vc	33~36	34~38	33~38	38~42	38~43	38~43	
			fz	0.012~0.012	0.014~0.014	0.018~0.018	0.022~0.022	0.056~0.056	0.056~0.056	
			RPM	10500~11500	9100~10000	7000~8000	6100~6700	3990~4600	3000~3400	





G8A01, G8A36 SERIES 2 FLUTE - SLOTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)									
						0.2	0.3	0.4	0.5	0.6	0.8	0.9	1.0	2.0	
P	5	Non-alloy steel	1.0D	0.05D	Vc	30	45	65	80	95	125	140	150	210	
					fz	0.001	0.002	0.002	0.004	0.005	0.006	0.007	0.01	0.013	
					RPM	47746	47746	51725	50930	50399	49736	49515	47746	33423	
	8-9	Low alloy steel	1.0D	0.05D	Vc	30	45	65	80	95	125	140	150	210	
					fz	0.001	0.002	0.002	0.004	0.005	0.006	0.007	0.01	0.013	
					RPM	47746	47746	51725	50930	50399	49736	49515	47746	33423	
	11.1	High alloyed steel, and tool steel	1.0D	0.05D	Vc	30	45	65	80	95	125	140	150	210	
					fz	0.001	0.002	0.002	0.004	0.005	0.006	0.007	0.01	0.013	
					RPM	47746	47746	51725	50930	50399	49736	49515	47746	33423	
	11.2	High alloyed steel, and tool steel	1.0D	0.05D	Vc	30	40	55	70	85	100	110	120	165	
					fz	0.001	0.002	0.002	0.003	0.004	0.006	0.007	0.008	0.013	
					RPM	47746	42441	43768	44563	45094	39789	38905	38197	26261	
H	38.1	Hardened steel	1.0D	0.05D	Vc	30	40	55	70	85	100	110	120	165	
					fz	0.001	0.002	0.002	0.003	0.004	0.006	0.007	0.008	0.013	
					RPM	47746	42441	43768	44563	45094	39789	38905	38197	26261	
	38.2	Hardened steel	1.0D	0.05D	Vc	25	40	50	65	75	80	80	110		
					fz	0.001	0.001	0.002	0.003	0.004	0.005	0.006	0.007	0.012	
					RPM	39789	42441	39789	41380	39789	29842	28294	25465	17507	
	39.1	Hardened steel	1.0D	0.05D	Vc	20	30	40	50	55	65	65	90		
					fz	0.001	0.001	0.001	0.002	0.003	0.004	0.005	0.005	0.009	
					RPM	31831	31831	31831	31831	29178	25863	22989	20690	14324	
	39.2	Hardened steel	1.0D	0.05D	Vc	20	25	30	40	45	50	50	70		
					fz	0.001	0.001	0.001	0.002	0.002	0.003	0.004	0.004	0.007	
					RPM	31831	26526	23873	25465	23873	19894	17684	15915	11141	
39.3	Hardened steel	1.0D	0.02D	Vc	15	20	25	30	40	40	40	60			
				fz	0.001	0.001	0.001	0.002	0.002	0.003	0.003	0.003	0.006		
				RPM	23873	21221	19894	19099	21221	15915	14147	12732	9549		
40	Chilled Cast Iron	1.0D	0.05D	Vc	30	40	55	70	85	100	110	120	165		
				fz	0.001	0.002	0.002	0.003	0.004	0.006	0.007	0.008	0.013		
				RPM	47746	42441	43768	44563	45094	39789	38905	38197	26261		
41	Hardened Cast Iron	1.0D	0.05D	Vc	25	40	50	65	75	80	80	110			
				fz	0.001	0.001	0.002	0.003	0.004	0.005	0.006	0.007	0.012		
				RPM	39789	42441	39789	41380	39789	29842	28294	25465	17507		

▶ NEXT PAGE





HIGH QUALITY PRODUCTS and ON TIME DELIVERY for WORLD-WIDE CUSTOMERS

Since 1982, YG-1 has been committed to quality, innovation and the unique customer experience. Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

EUROPE

BELGIUM	FINLAND	ITALY	PORTUGAL	SLOVENIA	THE NETHERLANDS
CROATIA	FRANCE	LITHUANIA	ROMANIA	SPAIN	TURKEY
CZECH REPUBLIC	GERMANY	NORWAY	RUSSIA	SWEDEN	UNITED KINGDOM
DENMARK	HUNGARY	POLAND	SERBIA	SWITZERLAND	

ASIA PACIFIC

AUSTRALIA	INDONESIA	MALAYSIA	SINGAPORE	UNITED ARAB EMIRATES
CHINA	ISRAEL	PAKISTAN	SOUTH KOREA	VIETNAM
HONG KONG	JAPAN	PHILIPPINES	TAIWAN	
INDIA	KINGDOM OF SAUDI ARABIA	THAILAND		

AMERICAS

BRAZIL	CANADA	COLOMBIA	MEXICO	UNITED STATES
--------	--------	----------	--------	---------------

AFRICA

EGYPT	SOUTH AFRICA
-------	--------------